

Flowrox Expulse™

Flowrox Expulse™ is a flexible inline pulsation dampener, which quiets noise while settling pipeline pressure peaks and uneven flow. The design is based on a double hose structure with an expansive inner hose, reinforced outer hose and compressed air between the layers.

SIMPLE AND EFFECTIVE

Flowrox Expulse absorbs up to 90% of pulsations.

Flowrox Expulse smooths the process medium flow which minimizes pressure peaks and significantly reduces the pulsation effect. It also saves energy **up to 10 %** by temporarily storing it to the flexible inner hose and filler gas.



PERFECT COMBINATION WITH A PULSATING POSITIVE DISPLACEMENT PUMP

Flowrox Expulse provides a flexible connection to the pump and compensates for possible misalignments of the pipeline. The dampener can also be easily removed to allow simple access for pump maintenance.

Flowrox Expulse is the perfect solution for any pulsating positive displacement pump. It can reduce hammering of the pipeline and pump to enable increased pump bearing and gearbox lifetime.

Benefits in the process

- Stabilizes flow of the process medium and reduces noise
- Pulsation dampener and a connection hose combined
- Inline and full bore dampener structure
- Non-clogging and self-cleaning
- Tolerates misalignments in the pipeline
- Quick to install and easily replaceable spare parts
- Ease of assembly and maintenance to the pump due to flexible connection
- Saves energy up to 10%
- Corrosion resistance and wear resistance to viscous and abrasive fluids

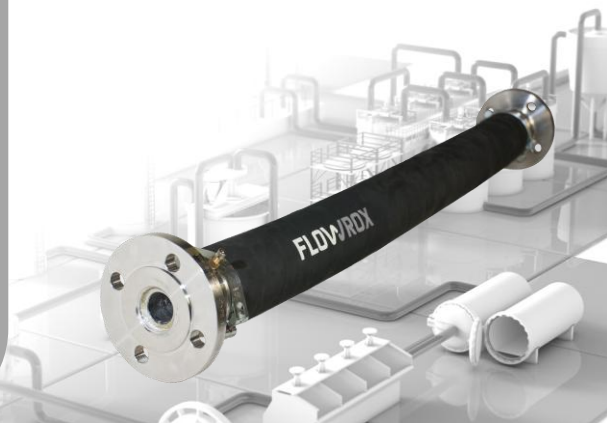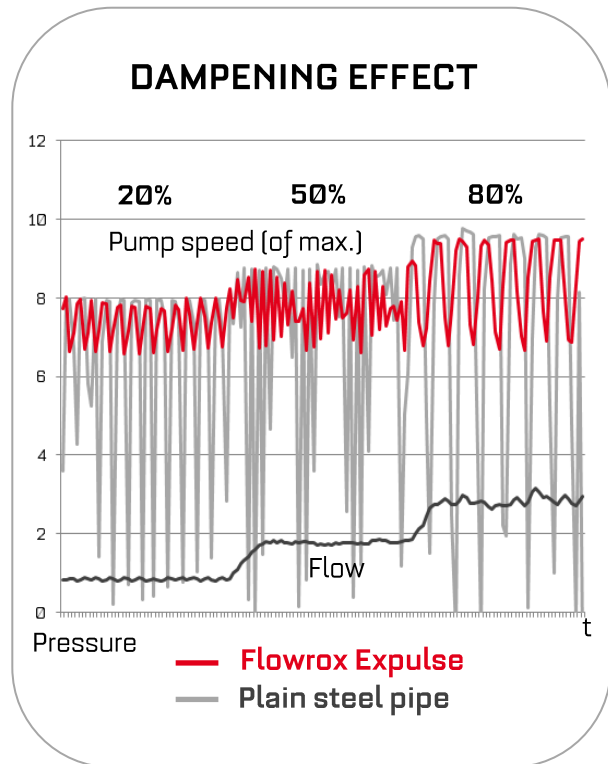


FLOWROX

Proven Performance

PRODUCT SPECIFICATION


TECHNICAL DATA

Size	DN32-DN100/ 1 ¼ "-4"
Hose material	EPDM as standard
Wetted parts	AISI316 and EPDM
Maximum pressure	10 bar
Maximum temperature	+ 95°C
Filling media between dampener hoses	Oil free compressed air
Standard features	Threaded ends
Auxiliaries	Flanges

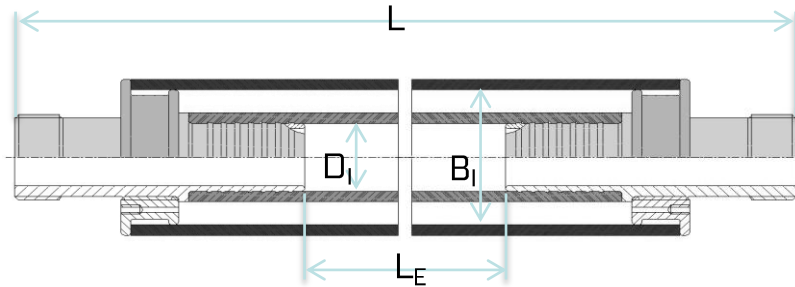

Size (DN)	L	Le	Di	Bi	Weight (kg)
32	1100	780	40	76	7
40	1100	724	50	102	11
50	1400	1024	50	102	13
65	1500	1108	76	115	18
80	1500	1100	102	203	38
100	2900	2500	102	203	55

FLOWROX OY
 Marssitie 1, P.O. Box 338,
 FI-53101 Lappeenranta, FINLAND
 Tel. +358 (0)201 113 311
 sales@flowrox.com
 www.flowrox.com

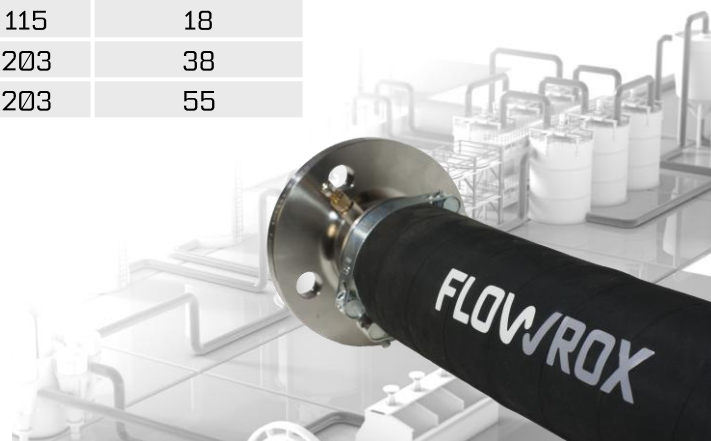

Information without engagement. All rights to changes without prior notice reserved.

FLOWROX

Proven Performance