



## Rodless Pneumatic Cylinders Magnetically Coupled

P1Z Series

aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
**pneumatics**  
process control  
sealing & shielding



ENGINEERING YOUR SUCCESS.



# Contents

## Rodless Pneumatic Cylinder Magnetically Coupled

Rodless Pneumatic Cylinder  
Magnetically Coupled

P1Z Series  
Ø 16 - 40 mm












	Page
<b>Basic Version</b>	<b>5</b>
Features	5
Description	5
Technical data	6
Loads, forces and moments	7
Cushioning diagram	8
Installation tips for use with external guide	8
Dimensions	9
Order instructions	11
<b>Guided Version</b>	<b>13</b>
Features	13
Description	13
Overview	14
Technical Data	15
Loads, forces and moments	16
Dimensions	18
Magnetic Switches	21
Order instructions	23
<b>Spare parts</b>	<b>24</b>

Rodless Pneumatic Cylinder  
Magnetically Coupled

# P1Z Series

Ø 16 - 40 mm

## Overview P1Z

<p><b>Basic Version</b></p>		<p><b>Guided Version</b></p>	
<p>Hexagonal nuts (included in scope of delivery)</p>		<p>Air connection on both sides Standard</p>	
<p>Flange mounting Option</p>		<p>Air connection at one end Option</p>	
<p>Foot mounting Option</p>		<p>With elastomeric bumpers Standard</p>	
		<p>With hydraulic shock absorbers Option</p>	
		<p>Profile rail for magnetic switches Option</p>	
		<p>Profile rail with magnetic switches Option</p>	



## Basic Version

Rodless Pneumatic Cylinder  
Magnetically Coupled

# P1Z Series

Basic Version

Ø 16 - 40 mm

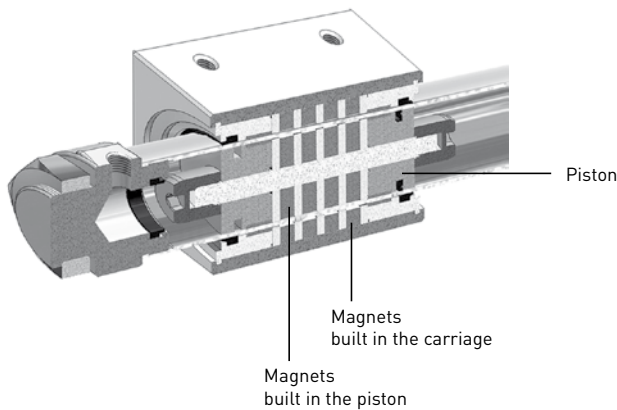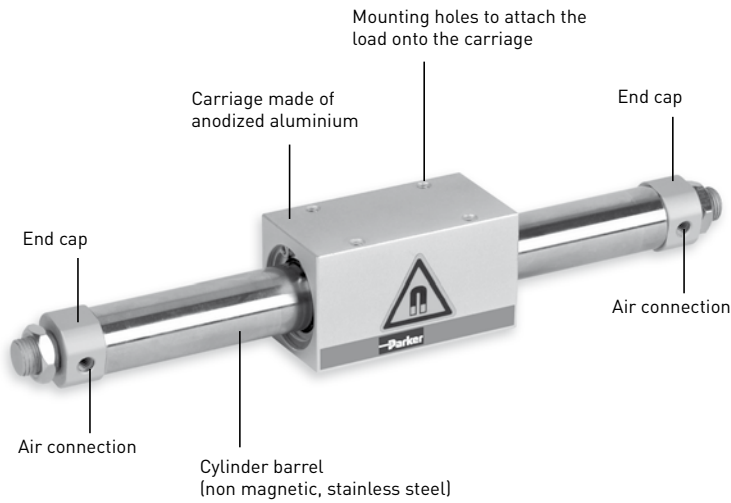

## Features

### P1Z Basic Version

- Double acting
- Magnetically coupled without mechanical connection
- Mechanical protection in case of occasional overload due to magnetic uncoupling
- Piston chamber and carriage are pressure tight
- Pressure tight and leak free system
- Dirt and dust cannot enter
- With adjustable pneumatic end cushioning on both sides
- Carriage is free to rotate 360° around the cylinder axis
- Various mounting arrangements

## Description

The P1Z is a rodless pneumatic cylinder. The piston and the carriage are equipped with ring magnets. The motion is transmitted via the magnetic force locking between the piston and the carriage.

# P1Z Series

Basic Version

Ø 16 - 40 mm

## Mounting and technical data

- The loads can be fitted onto the carriage by 4 tapped holes.
- The cylinder is mounted at the end caps with hexagonal nuts, flange or foot mountings.

### Mounting





With 2 hexagonal nuts to fix the cylinder  
(included in scope of delivery)



Flange mounting (pair)  
option



Foot mounting (pair)  
option



### Technical data

Piston diameter Ø [mm]	16	20	25	32	40
Max. stroke length [mm]	1000	1500	2000	2000	2000
Stroke tolerance [mm] up to 1000 mm	0/+1.5				
Stroke tolerance [mm] > 1000 mm	0/+2				
Temperature range [°C]	0 to 60				
Operating medium	Filtered compressed air, dry, lubricated or unlubricated * (other media on request)				
Air supply port size	M5	G1/8	G1/8	G1/8	G1/4
Max. magnetic coupling force [N]	157	236	383	703	942
Velocity range [m/s]	0.1 to 1.3				
Min. operating pressure [bar]	1.8				
Max. operating pressure [bar]	6.5	7			
Cushion length [mm]	9	15	15	12	19
Weight [kg]					
at 0 mm stroke	0.28	0.46	0.83	1.35	2.01
per 100 mm stroke	0.043	0.082	0.088	0.14	0.16

\* if external lubrication is added, this must always be continued.

### Materials

Cylinder barrel	Stainless steel
Carriage	Al, anodized
End cap	Al, anodized
Seals	NBR




## Loads, forces and moments


### Forces [N]

Piston Ø [mm]	16	20	25	32	40
Theoretical force at 6 bar [N]	120	188	295	483	754
Max. magnetic coupling force [N]	157	236	383	703	942

### Permissible lateral force, depending on the stroke length

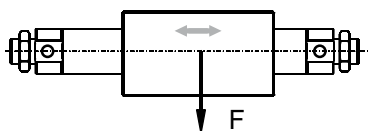


Ø [mm]	Permissible lateral force F [N]
16	30.0
20	50.0
25	70.0
32	100.0
40	165.0

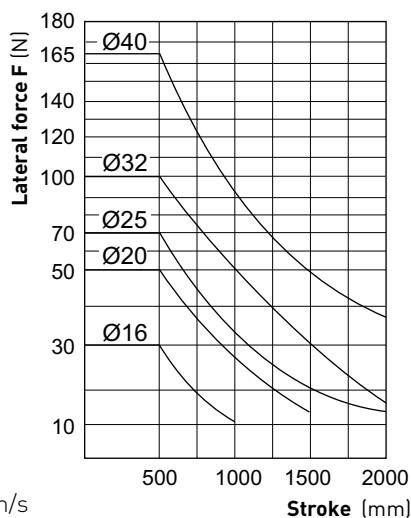



The values are based on velocities  $v \leq 0.4 \text{ m/s}$

### Permissible axial load, horizontal mounting

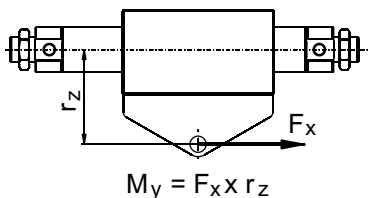

Ø [mm]	Max. Moment My [Nm]
16	1.2
20	2.5
25	3.8
32	8.5
40	13.0

### Permissible axial load, vertical mounting

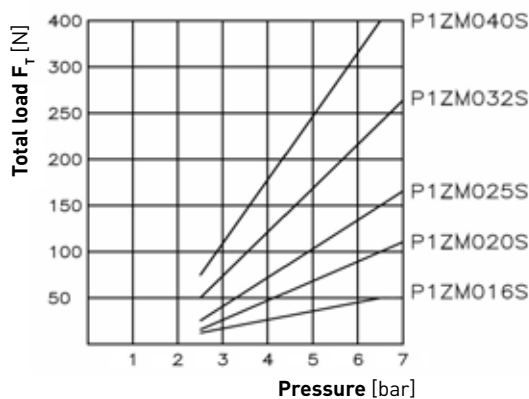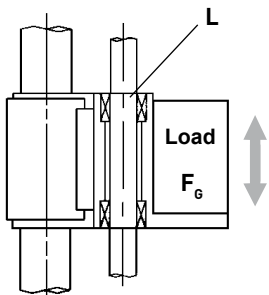

$L$  = Weight of the external carriage

$F_c$  = Load

$F_T$  = Total load = Load  $F_c$  + Weight of the external carriage  $L$  + Force due to friction

Rodless Pneumatic Cylinder  
Magnetically Coupled

## P1Z Series

Basic Version

Ø 16 - 40 mm

### Loads, forces and moments

If the operating conditions are outside of the permissible values, either the P1Z guided version or the P1Z in combination with an external guide should be used!  
Please note page 8.



**Dynamic forces must not exceed the maximum magnetic coupling force!**

Rodless Pneumatic Cylinder  
Magnetically Coupled


# P1Z Series

Basic Version

Ø 16 - 40 mm

If the permitted limit values are exceeded, additional shock absorbers should be fitted in the area of the centre of gravity.

## Cushioning diagram

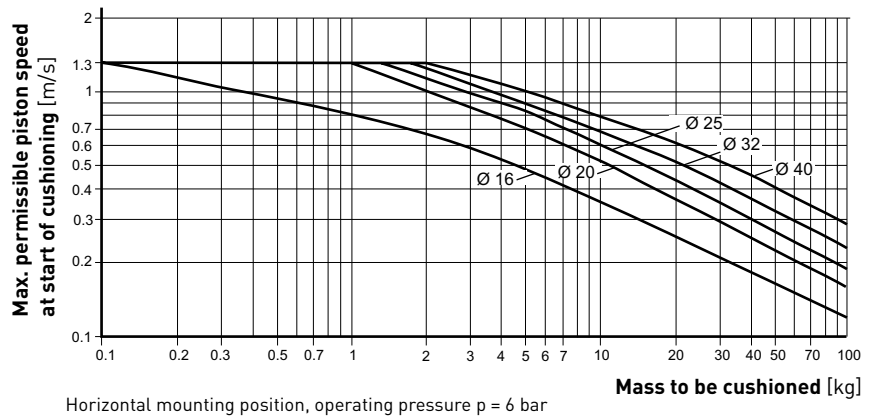


## Installation tips for use with external guide

When stopping a load having a large inertia force at the stroke end, tilting of the carriage and damage to the bearings and cylinder barrel may occur (fig. left).


To prevent this, the force transmission should be realized at the middle axis of the cylinder.

The combination of the shock absorber with an end stop, can help to prevent the tilting of the carriage (fig. right).

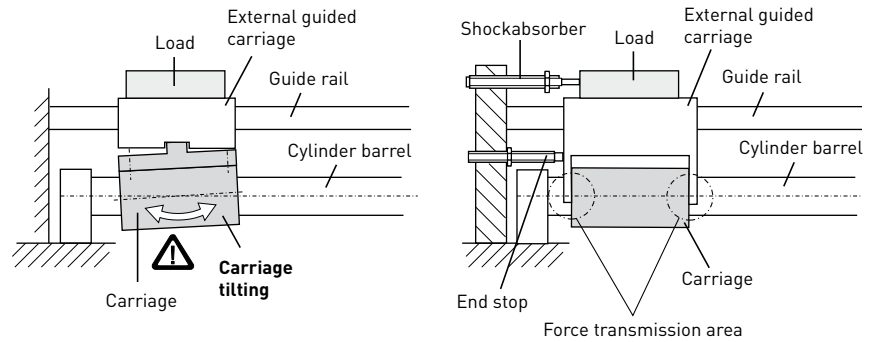



## Dimensions

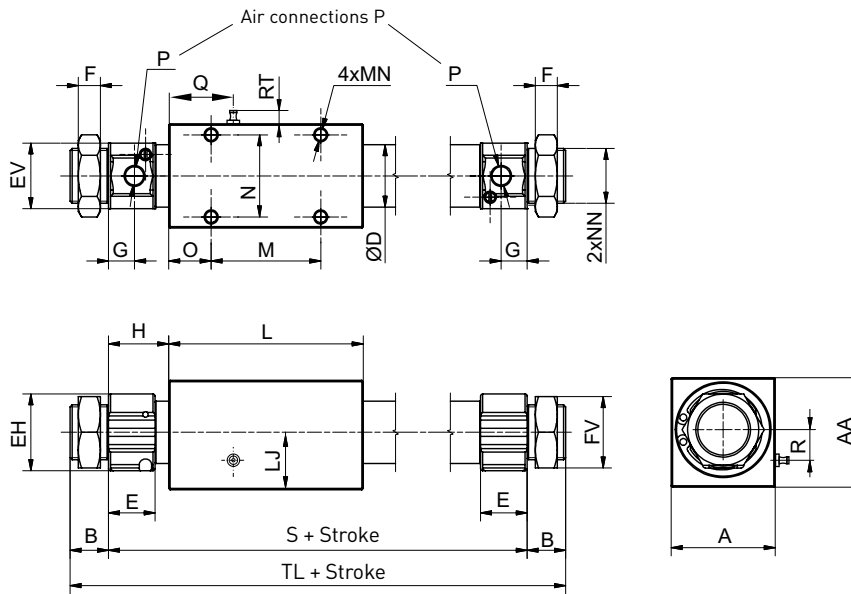

Rodless Pneumatic Cylinder  
Magnetically Coupled

## P1Z Series

Basic Version

Ø 16 - 40 mm

### Dimensions



Ø [mm]	A	AA	B	ØD	E	EH	EV	F	FV	G	H	L	LJ
16	32	34	10	18	14	18	18	4	14	5.5	18.5	61	16
20	38	40	14	22.8	17	28	24	8	26	9.5	22	71	19
25	48	48	16	27.8	17	34	30	8	32	9.5	22	76	24
32	60	60	16	35	17	40	36	8	32	9.5	23	87	30
40	70	70	16	43.0	21	48	45	10	41	11	29	92	35

Ø [mm]	M	MN	N	NN	O	P	Q	R	RT	S	TL
16	34	M4 x 0.7 x 6	25	M10 x 1	13.5	M5 x 0.8	-	-	-	98	118
20	40	M5 x 0.8 x 8	30	M20 x 1.5	15.5	G 1/8	-	-	-	115	143
25	50	M5 x 0.8 x 8	30	M26 x 1.5	13	G 1/8	21	16	9	120	152
32	50	M6 x 1 x 10	40	M26 x 1.5	18.5	G 1/8	-	-	-	133	165
40	60	M6 x 1 x 10	40	M32 x 1.5	16	G 1/4	24	21	9	150	182










Flange mountings									
Ø [mm]	F	Ø FD	FW	FX	FY	FZ	T	LS	Order no.
16	5.2	-	42	33	-	20	2.3	92	PDC15-FH*
20	-	6	52	40	20	32	3	115	PK1A20-FH*
25	-	7	80	64	28	44	5	120	PK1A25-FH*
32	-	7	80	64	28	44	5	133	PK1A25-FH*
40	-	7	80	64	28	44	5	150	PK1A40-FH*

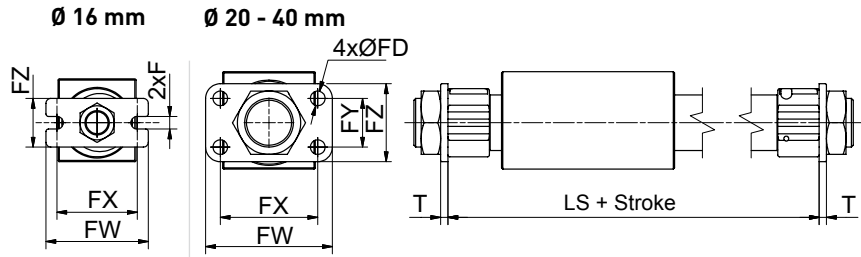

Material: galvanised steel  
 \* The mountings are supplied in pairs.

### Foot mountings

Ø [mm]	t	L	LC	ØLD	LE	LF	LH	LJ	LK	LX	LY	LS	LT	XL	XM	Order no.
16	2.3	14.8	8.8	-	5.2	6	14	16	-2	33	42	109.6	79	121.6	96.6	PDC15-LB*
20	3	28	18	6.2	-	10	23	19	4	30	43	151	85	171	121	PK1A20-LB*
25	3	35	23	7	-	12	30	24	6	46	62	166	**	222	**	PK1A25-LB*
32	3	35	23	7	-	12	30	30	0	46	62	179	**	203	**	PK1A25-LB*
40	3	36	24	7	-	12	30	35	5	46	62	198	**	254	**	PK1A40-LB*

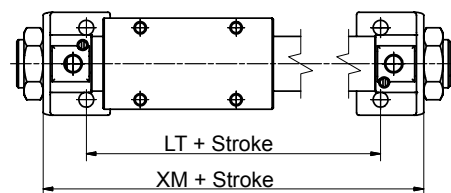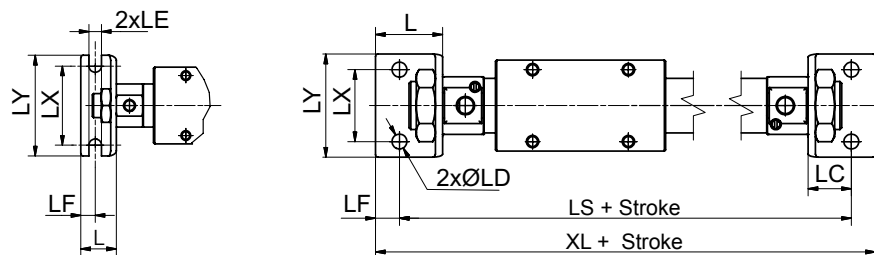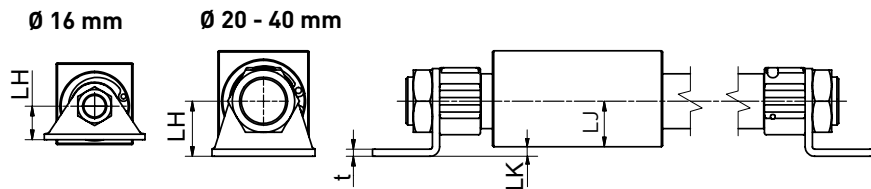

Material: galvanised steel  
 \* The mountings are supplied in pairs.

\*\* Inside foot mounting is not possible.

## Order instructions – Basic Cylinder – Series P1Z

Basic cylinder (15 digits)													With option (18 digits)				
<b>P</b>	<b>1</b>	<b>Z</b>	<b>M</b>	<b>0</b>	<b>1</b>	<b>6</b>	<b>S</b>	<b>A</b>	<b>N</b>	<b>0</b>	<b>8</b>	<b>5</b>	<b>0</b>	<b>W</b>	<b>F</b>	<b>M</b>	<b>N</b>

Piston diameter	
<b>016</b>	∅ 16 mm
<b>020</b>	∅ 20 mm
<b>025</b>	∅ 25 mm
<b>032</b>	∅ 32 mm
<b>040</b>	∅ 40 mm

End of stroke cushioning	
<b>A</b>	Pneumatically adjustable (∅ 16, 20, 25, 32 and 40 mm)

Stroke length	
max. stroke [mm]	Piston ∅ [mm]
1000	∅ 16
1500	∅ 20
2000	∅ 25
2000	∅ 32
2000	∅ 40

Options	
<b>B</b>	without
<b>W</b>	with

Mountings	
<b>N</b>	without
<b>F</b>	Foot mounting
<b>L</b>	Flange mounting

Air supply port type	
<b>M</b>	Metric thread (∅ 16 mm)
<b>B</b>	G-thread (∅ 20 - 40 mm)
(Other types on request)	

### Order code examples:

- **P1ZM016SAN0100B** ∅ 16 mm, stroke 100 mm, supplied with hexagonal nuts on each end cap.
- **P1ZM020SAN1000WFBN** ∅ 20 mm, stroke 1000 mm, with foot mounting at both end caps.




## Guided Version

Rodless Pneumatic Cylinder  
Magnetically Coupled

# P1Z Series Guided Version


Ø 16 - 40 mm

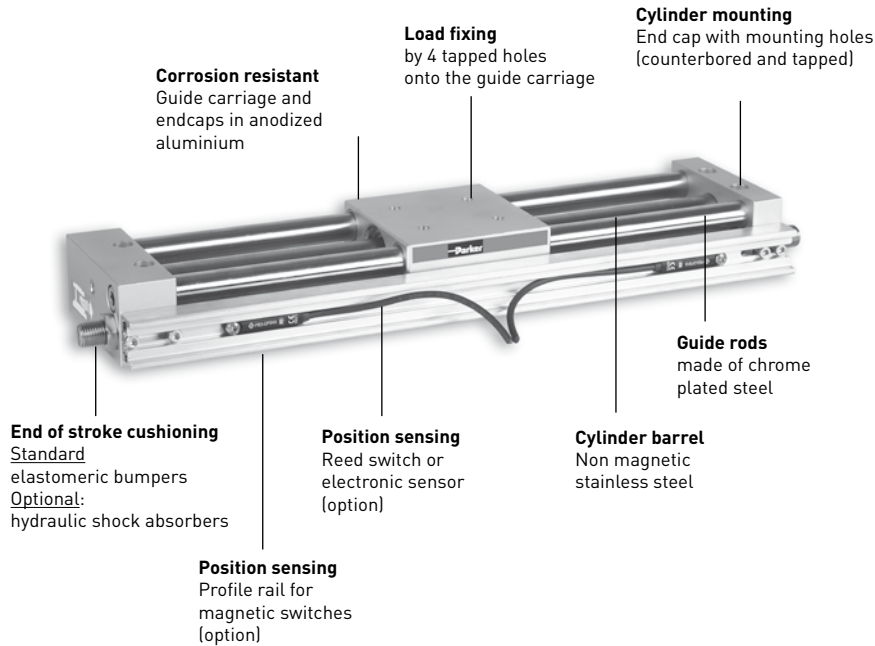

## Features

### Guided Version P1Z

- Double acting with guide
- Magnetically coupled without mechanical connection
- Mechanical protection in case of occasional overload due to magnetic uncoupling
- Piston chamber and Slide are pressure tight
- Pressure tight and leak free system
- Air connection at one end (option)
- End of stroke cushioning: with elastomeric bumpers (standard), with hydraulic shock absorbers (option)
- Position sensing: Al-profile rail for magnetic switches (option). Magnetic switches available as reed switches or as electronic sensors (option).

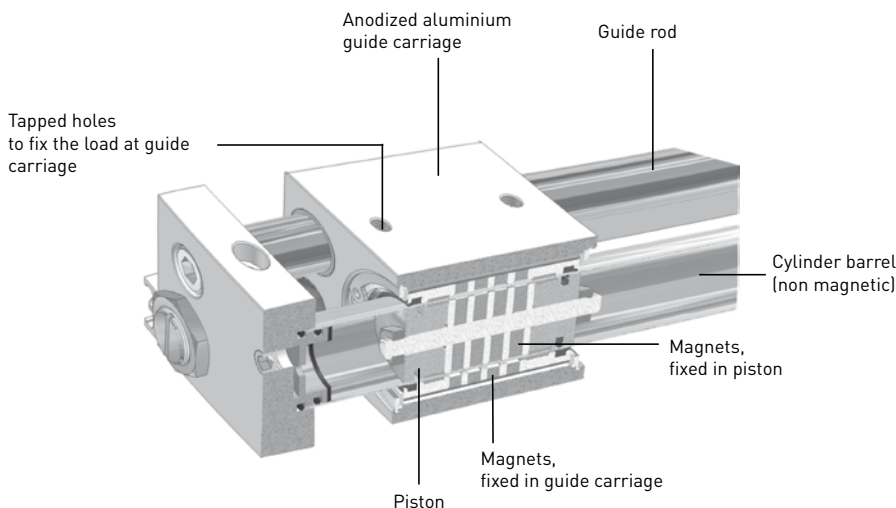

## Description

The P1Z is a rodless pneumatic cylinder with guide. The piston and the guide carriage are equipped with ring magnets.

The motion is transmitted via the magnetic force between the piston and the guide carriage.

The guided version consists of a carriage fitted with 4 plain bearings, guided on 2 guide rods. The design provides high rigidity, accurate guidance and a non rotating movement.

Rodless Pneumatic Cylinder  
Magnetically Coupled

# P1Z Series Guided Version

Ø 16 - 40 mm

## Overview

The end of stroke cushioning for light loads is provided by elastomeric bumpers (standard).

For medium and heavy loads hydraulic shock absorbers should be used (option).

The guide carriage is fitted with a magnet for position sensing (standard)

An Al-profile rail for magnetic switches is available as an option. The rail is located on the same side as the elastomeric bumpers or the shock absorbers.

Reed switches or electronic sensors in several versions can be moved in the profile rail along the entire stroke length. (Versions of magnetic switches refer to page 21.)

### Air connection



Guided version P1Z and air connection on both sides (standard)



Guided version P1Z and air connection at one end (option)

### End of stroke cushioning



Guided version P1Z and elastomeric bumpers (standard)



Guided version P1Z and hydraulic shock absorbers (option)

### Position sensing



Guided version P1Z with magnet in the guide carriage for position sensing (standard).



Guided version P1Z and Al-profile rail for magnetic switches (option).



Guided version P1Z and Al-profile rail with 2 magnetic switches (option).

Technical Data					
Piston diameter [mm]	16	20	25	32	40
Max. stroke length [mm]	750	1000	1500	1500	1500
Stroke tolerance [mm] up to 1000 mm	0/+1.5				
Stroke tolerance [mm] > 1000 mm	0/+2				
Temperature range [°C]	0 to 60				
Operating medium	Filtered compr. air, dry, lubricated or unlubricated * . [other media on request]				
Air supply port size	M5	G1/8	G1/8	G1/8	G1/4
Magnetic coupling force [N]	157	236	383	703	942
Velocity range [m/s]	0.05 to 0.4				
Min. operating pressure [bar]	2.3	2			
Max. operating pressure [bar]	6.5	7			
Weight [kg]					
at 0 mm stroke	0.9	1.52	1.70	3.63	5.44
per 100 mm stroke	0.2	0.33	0.42	0.53	0.86

\* if external lubrication is added, this must always be continued.

Materials	
Cylinder barrel	Stainless steel
Carriage	Al, anodized
End cap	Al, anodized
Seals	NBR
Guide rods	Steel, chrome plated

Rodless Pneumatic Cylinder  
Magnetically Coupled

## P1Z Series Guided Version

Ø 16 - 40 mm

### Mounting and technical data

The loads can be fixed onto the guide carriage by 4 tapped holes.

Cylinder mounting provided with 4 tapped and counterbored holes. Additional mountings are not required.

# P1Z Series

## Guided Version

Ø 16 - 40 mm






Forces [N]					
Piston Ø	16	20	25	32	40
Theoretical force at 6 bar [N]	120	188	295	483	754
Max. magnetic coupling force [N]	157	236	383	703	942

### Permissible lateral force, depending on the stroke length

#### Loads, forces and moments




Dynamic forces must not exceed the maximum magnetic coupling force!

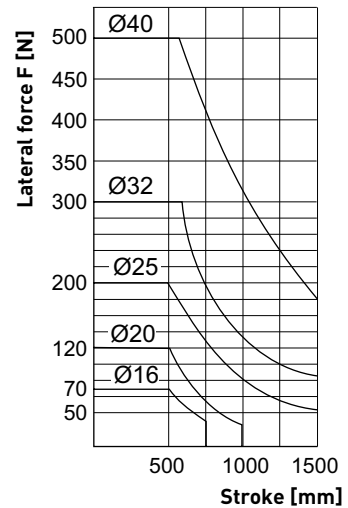

Ø [mm]	Max. Moment $M_x$ [Nm]	Max. Moment $M_y$ [Nm]	Max. Moment $M_z$ [Nm]
16	0.5	2.4	2.4
20	1.0	5.0	5.0
25	1.8	9.5	9.5
32	3.0	15.0	15.0
40	4.5	24.0	24.0

### Permissible moment $M_x$ depending on the stroke length

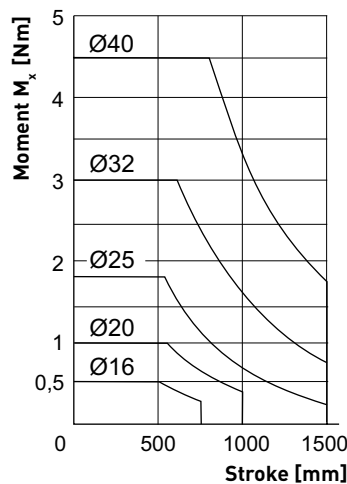




## Permissible axial load, vertical mounting

Rodless Pneumatic Cylinder  
Magnetically Coupled



# P1Z Series

## Guided Version

Ø 16 - 40 mm

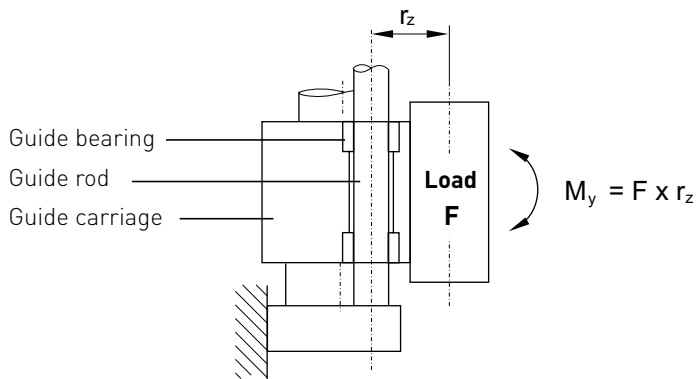

For vertical application please refer to the values in the diagrams !

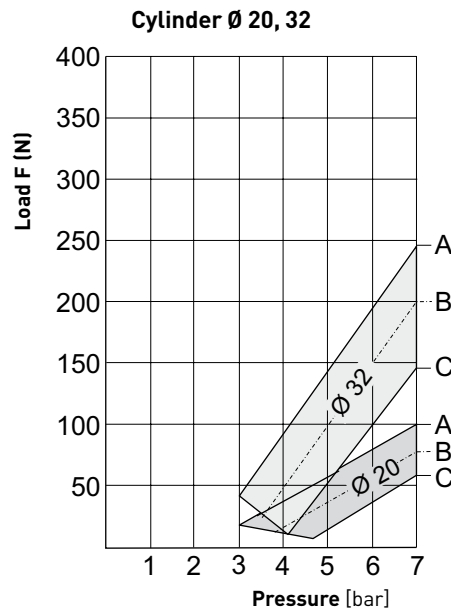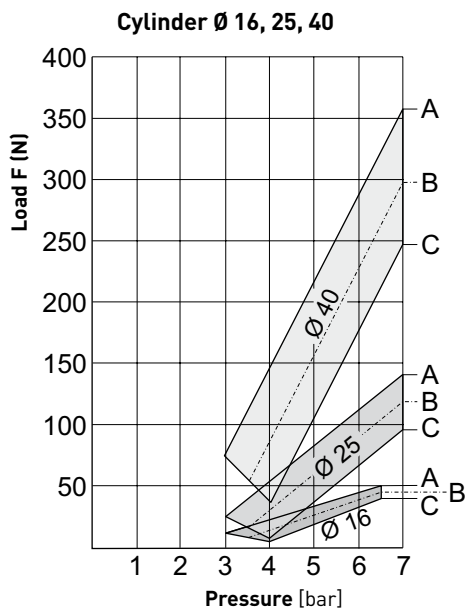

- A** = curve at moment  $M_y = 0$
- B** = curve at moment  $M_y/2 =$  see **column B**
- C** = curve at moment  $M_{y\max.} =$  see **column C**


Ø [mm]	Max. Load F [N]	<b>B</b> Moment My / 2 [Nm]	<b>C</b> Max. Moment My [Nm]
<b>16</b>	50.0	1.2	2.4
<b>20</b>	100.0	2.5	5.0
<b>25</b>	140.0	4.75	9.5
<b>32</b>	240.0	7.5	15.0
<b>40</b>	360.0	12	24.0

# P1Z Series Guided Version

Ø 16 - 40 mm

## Dimensions

### Dimensions [mm]



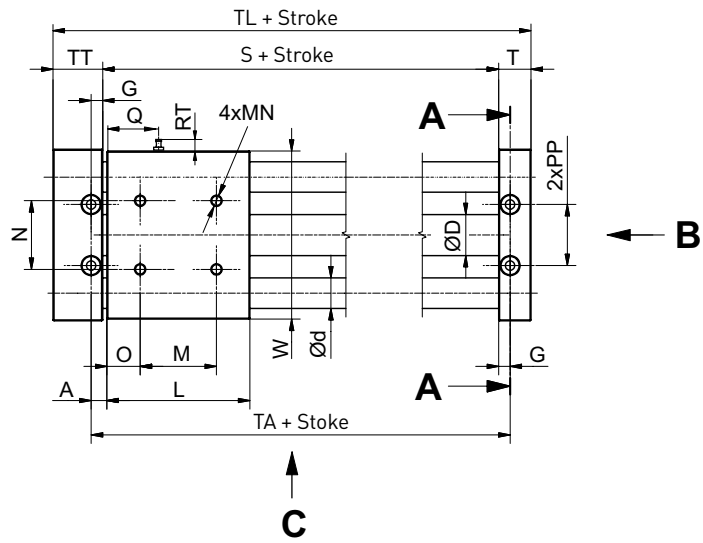


View C

View B

View A-A

End caps with 4 mounting holes for the Al-profile guide (page 20)

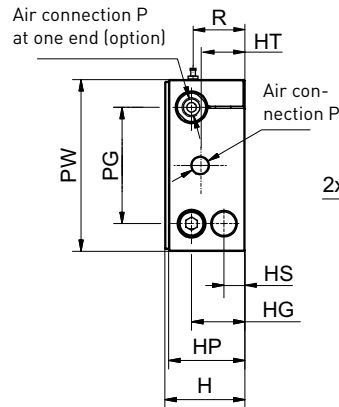

Ø [mm]	A	ØB	ØC	CC	ØD	Ød	F x depth	G	H	HG	HP	HS	HT	L	M	MN x depth
16	8	4.3	8	4.5	17.4	12	M5 x 10	6	34	25	33.5	12	21.5	65	34	M5 x 8
20	8	5.5	9.5	6.5	21.4	16	M6 x 10	6	42	28	40	12	23.5	75	40	M6 x 10
25	10	7	11	6.5	26.4	16	M8 x 10	8	54	32	52	40	24.5	80	40	M8 x 10
32	13.5	8.7	14	8	33.6	20	M10 x 15	10	66	46	64	20	41	91	60	M8 x 12
40	12.5	8.7	14	8	41.6	25	M10 x 15	10.5	76	50	74	56	28	95	65	M8 x 12

Ø [mm]	N	O	P	PG	PP	PW	Q	R	RT	S	T	TA	TL	TT	W	XA	XB	XC
16	30	15.5	M5	50	27	70	-	-	-	69	14	81	106	23	68	17	8	12
20	36	17.5	G1/8	61	32	90	-	-	-	79	17	91	122	26	88	20	11	12
25	70	20	G1/8	70	42	100	23	34	9	84	17	100	127	26	97	20	11	32
32	50	15.5	G1/8	86	50	122	-	-	-	97	20	117	145	28	118	22	14	12
40	105	15	G1/4	104	64	145	25.5	59	9	99	22	120	156	35	142	28	16	42


## Standard: Elastomeric bumpers

Rodless Pneumatic Cylinder  
Magnetically Coupled

# P1Z Series Guided Version


Ø 16 - 40 mm

## Dimensions

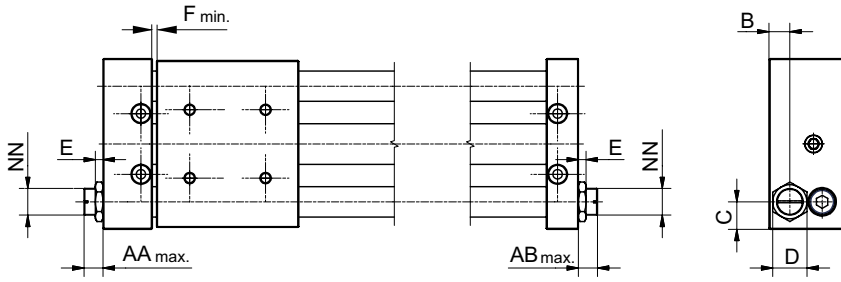

Ø [mm]	AA <sub>max.</sub>	AB <sub>max.</sub>	B	C	D	E	F <sub>min.</sub>	NN
16	13	13	12	10	14	4	2	M10X1
20	10	10	11	14.5	17	6	2	M14X1.5
25	11	20	40	15	17	6	2	M14x1.5
32	12	12	20	18	27	6	2,5	M20X1.5
40	11	11	56	20.5	27	6	2	M20x1.5

## Cushioning diagram for elastomeric bumpers

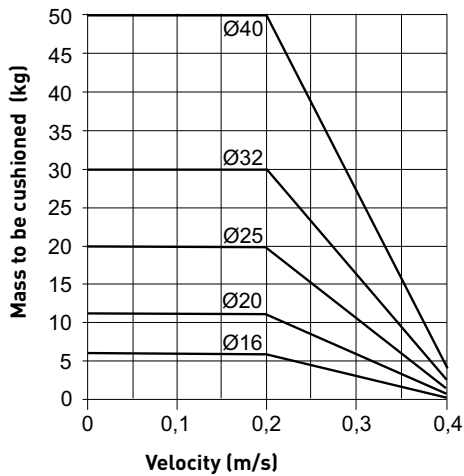

The diagram shows the capacities of the P1Z cylinders with elastomeric bumpers.

If the intersection between speed and mass is above the curves, it is imperative to use hydraulic shock absorbers to prevent cylinder damage.

### Example:

Cylinder Ø 32 mm, at a velocity of 0.3 m/s with a mass of 25 kg choose hydraulic shock absorbers.


Cylinder Ø 20 mm, at a velocity of 0.2 m/s with a mass of 10 kg choose the elastomeric bumpers.

# P1Z Series Guided Version

Ø 16 - 40 mm

## Option: Hydraulic shock absorbers

### Dimensions

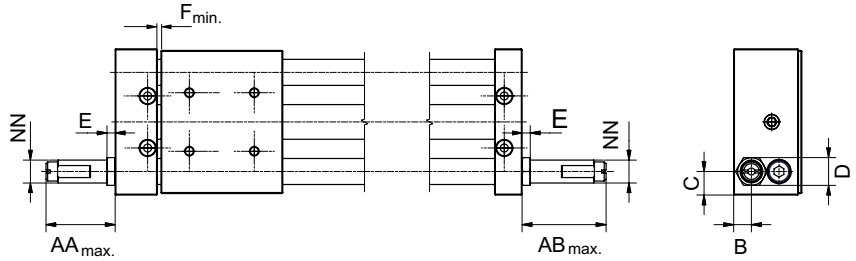

Ø [mm]	AA <sub>max.</sub>	AB <sub>max.</sub>	B	C	D	E	F <sub>min.</sub>	NN
16	18	27	12	10	12	4	2	M10X1
20	47	56	11	14.5	17	6	2	M14X1.5
25	47	56	40	15	17	6	2	M14x1.5
32	56	66	20	18	23	8	3.5	M20x1.5
40	51	64	56	20.5	23	8	2	M20x1.5

## Option: Al-profile rail for magnetic switches


### Position sensing

The rail is located on the same side as the end of stroke cushioning elements (Bumpers or shocks).

Reed switches or electronic sensors can be moved in the profile rail along the entire stroke length.



### Dimensions (Ø 16 - 40 mm)

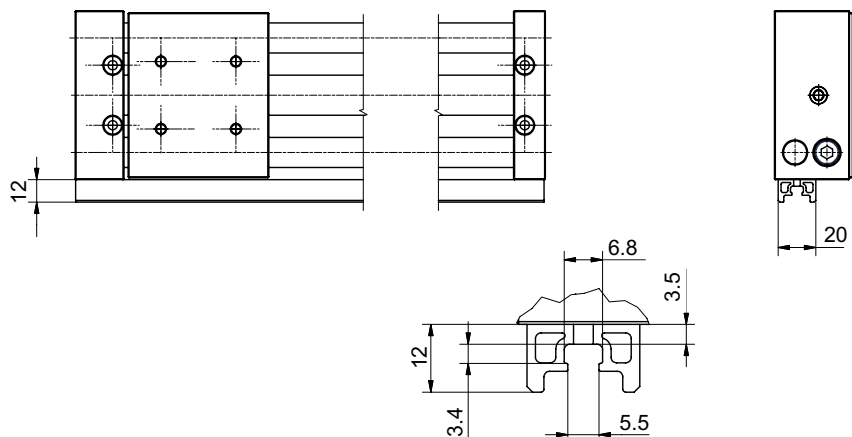

# Magnetic Switches

## Reed Switch and Electronic Sensor

### Series P8S

Technical Data			
Magnetic sensor	Unit	P8S-GR	P8S-GP
<b>Electrical Characteristics</b>			
Switching output / function		Reed / NO	PNP / NO
Electric configuration		2-pole	3-pole
Indicator LED yellow		yes	
Operating voltage $U_b$	V	10 - 30 AC/DC	10 - 30 DC
Ripple of $U_b$	%	≤ 10	-
Voltage drop	V	≤ 3	≤ 2
Power consumption unloaded $U_b = 24 V$	mA	-	≤ 10
Continuous current	mA	≤ 100	≤ 200
Max. switching capacity	W	≤ 6	-
Switchable capacity load	nF	100	-
Switching frequency	Hz	≤ 400	≤ 5000
Time delay before availability	ms	1.5 / 0.5	0.5 / 25
Switch point accuracy	mm	≤ 0.2	≤ 0.2
Switching distance	mm	ca. 15	ca. 15
Hysteresis	mm	2	2
EMC to EN 60947-5-2		yes	
Lifetime		≥ 40 x 10 <sup>6</sup> cycles	unlimited
Short circuit protection		-	yes
Reverse polarity protection		-	yes
Power-up pulse Suppression		-	yes
Protection for inductive load		-	yes
ATEX certification		-	yes
Category		-	3D / 3G
<b>Mechanical characteristics</b>			
Housing		PA12	
Cable type		PUR / black	
Cable cross section	mm <sup>2</sup>	2 x 0.14	
Bending radius fixed installation	mm	≥ 20	
Bending radius moving	mm	≥ 30	
<b>Shock resistance</b>			
Protection EN 60529	IP	68	
Ambient temperature range	°C	- 25 to + 80	
Vibration EN 60068-2-6	G	15, 11 ms, 10 up to 55 Hz, 1 mm	
Permanent shock EN 60068-2-29	G	30, 11 ms, 1000 shocks per axis	
Shock EN 60068-2-27	G	50, 11 ms	

### Magnetic Switches

Magnet switches are used for the contactless sensing of end or intermediate positions of the carriage.

The new generation of t-slot switches convince with easy mounting avoiding special tools and with a drop in mounting.

Due to new electronics the hysteresis is very small and allows a very accurate switching point.

### Electronic Sensor

This type of electronic sensor with PNP function provides a short circuit as well as a transient protection as standard.

The new state of the art electronics inside can be used for endless lifetime. Especially if the application demand for high switching frequency is required.

### Reed Switch

The 2-pole reed switch is a price attractive alternative while offering reliable and proven function for a lot of applications.

An integrated LED shows the status of the switch visually.

Carriage speed and switching distance affect signal duration and should be considered in conjunction with the minimum reaction time of ancillary control equipment.

In accordance to this, the contact travel must be included in the calculation.

$$\text{Min. reaction time} = \frac{\text{Switching distance}}{\text{Piston speed}}$$




# Magnetic Switches

## Reed Switch and Electronic Sensor

Series P8S


### Electrical Connection Reed Switch

normally open



### Electrical Connection Electronic Sensor PNP

normally open



### Electric Service Life Protective Measures


The reed switches are sensitive to excessive currents and inductions. With high switching frequencies and inductive loads such as relays, solenoid valves or lifting magnets, service life will be greatly reduced.

With resistive and capacitive loads with high switch-on current, such as light bulbs, a protective resistor should be fitted. This also applies to long cable lengths and voltages over 100 V.

In the switching of inductive loads such as relays, solenoid valves and lifting magnets, voltage peaks (transients) are generated which must be suppressed by protective diodes, RC loops or varistors.


### Connection Examples

- Load with protective circuits
- (a) Protective resistor for light bulb
- (b) Freewheel diode on inductivity
- (c) Varistor on inductivity
- (d) RC element on inductivity




For the type P8S-GP, external protective circuits are not normally needed.

### Dimensions (mm) – Type P8S-GR, P8S-GP

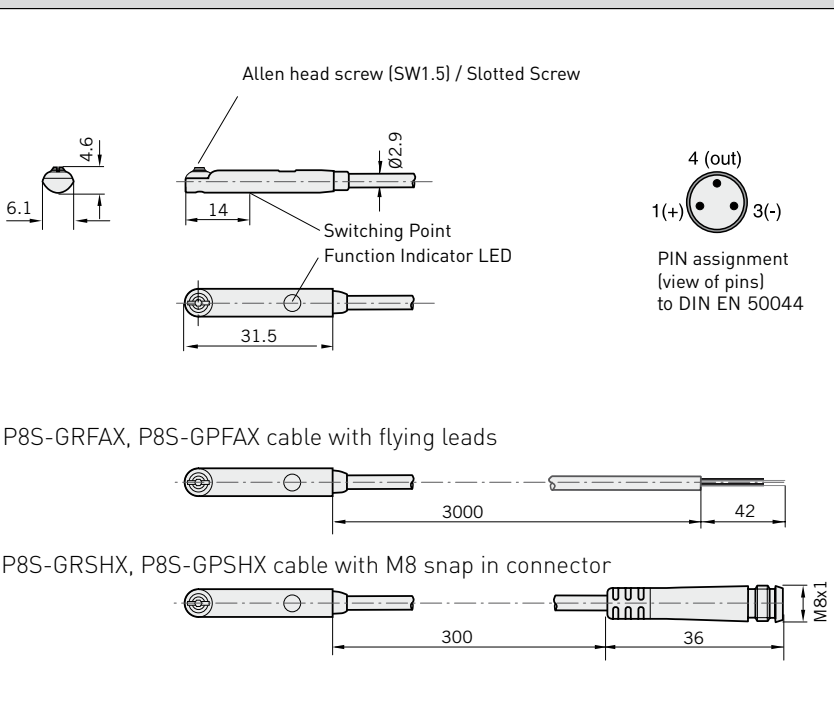

### Installation for Magnetic T-Slot Switches

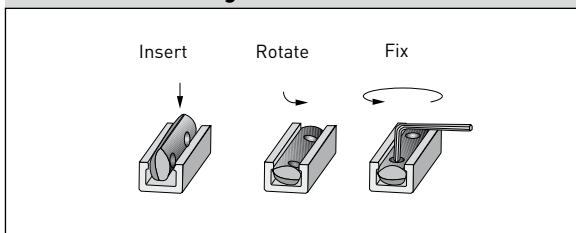

### Order number

	M8 Connector, snap in, 3-pole 0.3 m	FL flying leads 3 m
<b>Reed NO (2-wire)</b>	P8S-GRSHX	P8S-GRFAX
<b>PNP NO</b>	P8S-GPSHX	P8S-GPFAX

## Order instructions

Basic cylinder (15 digits)													With option (18 digits)																				
P	1	Z	M	0	1	6	T	C	N	0	8	5	0	W	N	M	L																
				<table border="1"> <thead> <tr> <th colspan="2">Piston diameter</th> </tr> </thead> <tbody> <tr> <td>016</td> <td>∅ 16 mm</td> </tr> <tr> <td>020</td> <td>∅ 20 mm</td> </tr> <tr> <td>025</td> <td>∅ 25 mm</td> </tr> <tr> <td>032</td> <td>∅ 32 mm</td> </tr> <tr> <td>040</td> <td>∅ 40 mm</td> </tr> </tbody> </table>			Piston diameter		016	∅ 16 mm	020	∅ 20 mm	025	∅ 25 mm	032	∅ 32 mm	040	∅ 40 mm				<table border="1"> <thead> <tr> <th colspan="2">Options</th> </tr> </thead> <tbody> <tr> <td>B</td> <td>without</td> </tr> <tr> <td>W</td> <td>with</td> </tr> </tbody> </table>			Options		B	without	W	with			
Piston diameter																																	
016	∅ 16 mm																																
020	∅ 20 mm																																
025	∅ 25 mm																																
032	∅ 32 mm																																
040	∅ 40 mm																																
Options																																	
B	without																																
W	with																																
				<table border="1"> <thead> <tr> <th colspan="2">Version</th> </tr> </thead> <tbody> <tr> <td>G</td> <td>Guided version and air connection on both sides</td> </tr> <tr> <td>T</td> <td>Guided version and air connection at one end</td> </tr> </tbody> </table>			Version		G	Guided version and air connection on both sides	T	Guided version and air connection at one end				<table border="1"> <thead> <tr> <th colspan="2">Air supply port type</th> </tr> </thead> <tbody> <tr> <td>M</td> <td>Metric thread (∅ 16 mm)</td> </tr> <tr> <td>B</td> <td>G-thread (∅ 20 - 40 mm)</td> </tr> <tr> <td colspan="2">(Other types on request)</td> </tr> </tbody> </table>			Air supply port type		M	Metric thread (∅ 16 mm)	B	G-thread (∅ 20 - 40 mm)	(Other types on request)								
Version																																	
G	Guided version and air connection on both sides																																
T	Guided version and air connection at one end																																
Air supply port type																																	
M	Metric thread (∅ 16 mm)																																
B	G-thread (∅ 20 - 40 mm)																																
(Other types on request)																																	
				<table border="1"> <thead> <tr> <th colspan="2">End of stroke cushioning</th> </tr> </thead> <tbody> <tr> <td>C</td> <td>with elastomeric bumpers</td> </tr> <tr> <td>H</td> <td>with two hydraulic shock absorbers</td> </tr> </tbody> </table>			End of stroke cushioning		C	with elastomeric bumpers	H	with two hydraulic shock absorbers				<table border="1"> <thead> <tr> <th colspan="2">Position sensing</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>without</td> </tr> <tr> <td>L</td> <td>Al-profile without magnetic switch</td> </tr> <tr> <td>S</td> <td>2 Reed switches, 0.3 m with M8 connector, snap in</td> </tr> <tr> <td>C</td> <td>2 Reed switches, 3 m flying leads</td> </tr> <tr> <td>K</td> <td>2 Electronic sensors PNP 0.3 m with M8 connector, snap in</td> </tr> <tr> <td>H</td> <td>2 Electronic sensors PNP 3 m flying leads</td> </tr> </tbody> </table>			Position sensing		N	without	L	Al-profile without magnetic switch	S	2 Reed switches, 0.3 m with M8 connector, snap in	C	2 Reed switches, 3 m flying leads	K	2 Electronic sensors PNP 0.3 m with M8 connector, snap in	H	2 Electronic sensors PNP 3 m flying leads	
End of stroke cushioning																																	
C	with elastomeric bumpers																																
H	with two hydraulic shock absorbers																																
Position sensing																																	
N	without																																
L	Al-profile without magnetic switch																																
S	2 Reed switches, 0.3 m with M8 connector, snap in																																
C	2 Reed switches, 3 m flying leads																																
K	2 Electronic sensors PNP 0.3 m with M8 connector, snap in																																
H	2 Electronic sensors PNP 3 m flying leads																																
				<table border="1"> <thead> <tr> <th colspan="2">Stroke length</th> </tr> <tr> <th>max. stroke [mm]</th> <th>piston ∅ [mm]</th> </tr> </thead> <tbody> <tr> <td>750</td> <td>∅ 16</td> </tr> <tr> <td>1000</td> <td>∅ 20</td> </tr> <tr> <td>1500</td> <td>∅ 25</td> </tr> <tr> <td>1500</td> <td>∅ 32</td> </tr> <tr> <td>1500</td> <td>∅ 40</td> </tr> </tbody> </table>			Stroke length		max. stroke [mm]	piston ∅ [mm]	750	∅ 16	1000	∅ 20	1500	∅ 25	1500	∅ 32	1500	∅ 40													
Stroke length																																	
max. stroke [mm]	piston ∅ [mm]																																
750	∅ 16																																
1000	∅ 20																																
1500	∅ 25																																
1500	∅ 32																																
1500	∅ 40																																

### Order code examples:

- **P1ZM016TCN0100B** Cylinder guided version -∅ 16 mm, stroke 100 mm, with air connection at one end and elastomeric bumpers.
- **P1ZM020GHN1000WNBL** Cylinder guided version -∅ 20 mm, stroke 1000 mm, with air connection on both sides, with two hydraulic shock absorbers and profile rail for magnetic switches.

## Spare parts

Rodless Pneumatic Cylinder  
Magnetically Coupled

# P1Z Series

Ø 16 - 40 mm

### Elastomeric bumpers (2 pieces)



Elastomeric bumper (2 pieces)	
Ø [mm]	Order no.
16	14332
20	14333
25	
32	14334
40	

### Spare parts

### Screw in one-way flow control valve with exhaust restrictor (1 piece)



Screw in one-way flow control valve with exhaust restrictor (1 piece)		
Ø [mm]	Connection	Order no.
16	M5	KT0433
20	G 1/8	KW0520
25		
32	G 1/4	KW0521
40		





# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,**  
Dubai

Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt

Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener  
Neustadt

Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles

Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BY – Belarus,** Minsk

Tel: +375 17 209 9399  
parker.belarus@parker.com

**CH – Switzerland,** Etoy

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup

Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid

Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Athens

Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budapest

Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland,** Dublin

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IT – Italy,** Corsico (MI)

Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty

Tel: +7 7272 505 800  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal

Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker

Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal,** Leca da Palmeira

Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest

Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow

Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica

Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto

Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul

Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev

Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom,** Warwick

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario

Tel: +1 905 693 3000

**US – USA,** Cleveland

Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill

Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai

Tel: +86 21 2899 5000

**HK – Hong Kong**

Tel: +852 2428 8008

**IN – India,** Mumbai

Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo

Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul

Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam

Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington

Tel: +64 9 574 1744

**SG – Singapore**

Tel: +65 6887 6300

**TH – Thailand,** Bangkok

Tel: +662 717 8140

**TW – Taiwan,** Taipei

Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires

Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos

Tel: +55 12 4009 3500

**CL – Chile,** Santiago

Tel: +56 2 623 1216

**MX – Mexico,** Apodaca

Tel: +52 81 8156 6000

**VE – Venezuela,** Caracas

Tel: +58 212 238 5422

### Parker Hannifin GmbH

Pat-Parker-Platz 1

D-41564 Kaarst (Germany)

Tel: +49 2131 4016-0

Fax: +49 2131 4016-9199

E-Mail: [parker.germany@parker.com](mailto:parker.germany@parker.com)

Internet: [www.parker.com](http://www.parker.com), [www.parker-origa.com](http://www.parker-origa.com)

