



Screwdriving technology

Automation

Air motors

Air tools

DEPRAG

**Handheld Screwdriver
pneumatic**

SENSOMAT

**The Control Screwdriver with regulated clutch function
Seating torque from 0.3 – 5 Nm (3 – 44 in.lbs)**

- **Thread forming with maximum motor power**
- **Seating torque less than driving torque**
- **Thread forming instead of thread damaging**
- **ergonomic**
- **robust**

Our pneumatic handheld screwdrivers SENSOMAT with mechanical clutch function are particularly suitable for applications such as:

- Sheet metal assemblies
- Wood assemblies
- Self-tapping through bolts

The SENSOMAT has been specially designed for screw joints where the screw-driving torque (forming torque) is close to or even higher than the shut-off torque due to high friction during assembly.


In this way for example thread forming or thread cutting screws can be reliably processed with this screwdriver which is equipped with a mechanical clutch lock – there is no chance of damaging the screw by over-tightening.

The SENSOMAT control screwdriver tightens the screw with full motor torque. Just before the base of the screw head is seated, the shut-off clutch is released and the screwdriver switches off exactly at the pre-set torque. The screw is completely screwed in without damaging the screw connection.

The SENSOMAT, a further development of the well-known MINIMAT screwdrivers achieves high torque accuracy and low $\pm 3\%$ standard deviation with the help of the highly accurate shut-off clutch.

When used under the correct conditions DEPRAG pneumatic screwdrivers with shutoff clutch conform with a Cmk value of ≥ 1.67 with $\pm 10\%$ tolerance in relation to 6 Sigma according to ISO 5396.

In other words a Cmk value of 1.67 means that there is a failure rate of 0.6 per million screw assemblies.

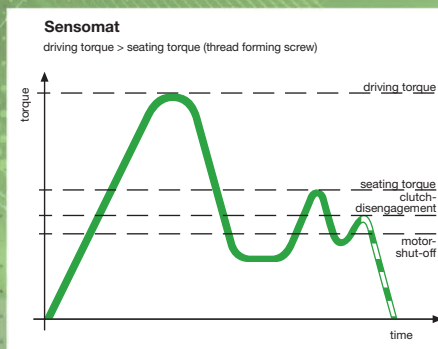

TECHNICAL DATA SENSOMAT straight version

Screwdriver Style		Motor size 1				Motor size 2			Motor size 3	
Driver reversible, right shut-off, Push-To-Start	Type Part no.	347S-218 U 405158 A	347S-318 U 405158 B	347S-518 U 405158 C	347S-618 U 405158 D	347S-328 U 386542 B	347S-428 U 386542 D	347S-528 U 386542 C	346S-238 U 409114 B	346S-738 U 409114 C
Screws	up to	M3	M3	M3	M3	M4	M4	M5	M5	M5
Seating-Torque, minimum	Nm / in.lbs	0.3 / 3	0.4 / 4	0.4 / 4	0.4 / 4	0.4 / 4	0.4 / 4	0.3 / 3	0.5 / 5	0.4 / 4
Seating-Torque, maximum	Nm / in.lbs	1 / 9	1.4 / 12	2 / 18	2 / 18	2.8 / 25	3.5 / 31	5 / 44	4.5 / 40	5 / 44
Driving-Torque, maximum	Nm / in.lbs	1.1 / 10	1.6 / 14	2.2 / 19	2.2 / 19	3.1 / 27	3.9 / 36	5.5 / 49	5 / 44	7 / 62
Speed, idling	rpm	1900	1300	900	600	1100	750	500	2300	1200
Air consumption	m ³ /min / cfm	0.23 / 8	0.23 / 8	0.23 / 8	0.23 / 8	0.3 / 11	0.3 / 11	0.3 / 11	0.4 / 14	0.4 / 14
Main body dia.	mm / in.	28 / 1 ¹ / ₈	28 / 1 ¹ / ₈	28 / 1 ¹ / ₈	28 / 1 ¹ / ₈	33 / 1 ⁵ / ₁₆	33 / 1 ⁵ / ₁₆	33 / 1 ⁵ / ₁₆	44 / 1 ³ / ₄	44 / 1 ³ / ₄
Length	mm / in.	218 / 8 ¹⁹ / ₃₂	218 / 8 ¹⁹ / ₃₂	218 / 8 ¹⁹ / ₃₂	218 / 8 ¹⁹ / ₃₂	250 / 9 ⁷ / ₈	250 / 9 ⁷ / ₈	250 / 9 ⁷ / ₈	274 / 10 ³ / ₄	290 / 11 ⁷ / ₁₆
Weight	kg / lbs	0.52 / 1.1	0.52 / 1.1	0.52 / 1.1	0.52 / 1.1	0.76 / 1.7	0.76 / 1.7	0.76 / 1.7	1.41 / 3.1	1.48 / 3.2
Noise level	dB (A)	62	62	62	62	67	67	67	74	74
Air hose dia.	mm / in.	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄	6 / 1 ⁴ / ₄
Drive hex. female		1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Quick change chuck, mounted		yes	yes	yes	yes	yes	yes	yes	yes	yes

Performance data relate to an air pressure of 6.3 bar (90 PSI)

Standard Equipment

Hose coupling with nozzle and nipple · Torque adjustment tool · Assortment of clutch springs

Required Accessories

		Motor size 1	Motor size 2	Motor size 3
For combination bit and sensor sleeve				
Finder	Part no.	339982	339982	339982
Counter nut	Part no.	339983	339983	339983
For screw suction (bit and sensor sleeve)				
Spring sleeve	Part no.	401613 A	401613 B	-
For combination bit holder (magnetic), bit and sensor sleeve				
Finder	Part no.	343981	343981	343981
Counter nut	Part no.	343982	343982	343982
Sensor sleeve and bits see leaflet: Accessories D 3320 E, page 14 and 15.				

Optional Equipment

		Motor size 1	Motor size 2	Motor size 3
Exhaust hose (0.6 m / 2 ft.)	Part no.	328843	-	328842
Exhaust hose (1 m / 3.3 ft.)	Part no.	-	389653 A	-
Support ring	Part no.	-	389775 A	-
Adjustment bushing (for torque adjust- ment without sensor sleeve)	Part no.	461319	461319	461319
Sensor sleeve and bits see leaflet: Accessories D 3320 E, page 14 and 15.				



TECHNICAL DATA SENSOMAT pistol grip design

Screwdriver Style		Motor size 2			Motor size 3	
Driver reversible, right shut-off						
Trigger start	Type	347S-327 U	347S-427 U	347S-527 U	345S-237U	345S-737U
Lower air-inlet	Part no.	391486 B	391486 D	391486 C	392773 A	392773 B
Driver reversible, right shut-off						
Trigger start	Type	347S-327OU	347S-427OU	347S-527OU	-	-
Upper air-inlet	Part no.	391490 B	391490 D	391490 C	-	-
Screws	up to	M4	M4	M5	M5	M5
Seating-Torque, minimum	Nm / in.lbs	0.4 / 4	0.4 / 4	0.3 / 3	0.5 / 5	0.4 / 4
Seating-Torque, maximum	Nm / in.lbs	3 / 26	3.5 / 31	5 / 44	4.5 / 40	5 / 44
Driving-Torque, maximum	Nm / in.lbs	3.3 / 29	3.9 / 34	5.5 / 49	5 / 44	7 / 62
Speed, idling	rpm	1100	750	500	2300	1200
Air consumption	m ³ /min / cfm	0.3 / 11	0.3 / 11	0.3 / 11	0.4 / 14	0.4 / 14
Distance from spindle centre to side	mm / in.	14.5 / 9/16	14.5 / 9/16	14.5 / 9/16	22 / 7/8	22 / 7/8
Length	mm / in.	240 / 9 7/16	240 / 9 7/16	240 / 9 7/16	244 / 9 5/8	260 / 10 1/4
Weight	kg / lbs	0.82 / 1.8	0.82 / 1.8	0.82 / 1.8	1.5 / 3.3	1.6 / 3.5
Noise level	dB (A)	69	69	69	66	66
Air hose dia.	mm / in.	6 / 1/4	6 / 1/4	6 / 1/4	6 / 1/4	6 / 1/4
Drive hex. female		1/4"	1/4"	1/4"	1/4"	1/4"
Quick change chuck, mounted		yes	yes	yes	yes	yes

Performance data relate to an air pressure of 6.3 bar (90 PSI)

Required Accessories

		Motor size 2	Motor size 3
For combination bit and sensor sleeve			
Finder	Part no.	339982	339982
Counter nut	Part no.	339983	339983
For screw suction (bit and sensor sleeve)			
Spring sleeve	Part no.	401613 B	-
For combination bit holder (magnetic), bit and sensor sleeve			
Finder	Part no.	343981	343981
Counter nut	Part no.	343982	343982
Sensor sleeve and bits see leaflet: Accessories D 3320 E, page 14 and 15.			

Optional Equipment

Exhaust hose (0.75 m / 2.5 ft.) with air hose (2 m / 6.6 ft.)	Part no.	-	330628 A
Adjustment bushing (for torque adjust- ment without sensor sleeve)	Part no.	461319	461319
Sensor sleeve and bits see leaflet: Accessories D 3320 E, page 14 and 15.			



It is necessary to use a torque support (e.g. stand, handgrip) for maximum torque:
over 4 Nm for straight design and over 10 Nm for pistol grip design.
Suitable torque supports can be found in our brochure D 3340 E.

DEPRAG

DEPRAG SCHULZ GMBH u. CO.

P.O. Box 1352, D-92203 Amberg, Germany

Carl-Schulz-Platz 1, D-92224 Amberg

Phone (+49) 9621 371-0, Fax (+49) 9621 371-120

www.deprag.com

info@deprag.de

CERTIFIED AS PER DIN EN ISO 9001
