



SPRAY NOZZLES FOR INDUSTRIAL APPLICATIONS



SPRAY NOZZLES & ASSEMBLY FITTINGS

GENERAL CATALOGUE

PNR ITALIA



PNR Italy, founded in 1968, has always dedicated itself to the design and manufacturing of industrial spray nozzles and systems. In all these years PNR made major investments both in machinery and human resources to develop top quality products and today is one of the most modern spray nozzles manufacturing facilities in the world. We manufacture thousands of different products to offer our customers one of the most complete product ranges in the world, and keep focused on research plus innovation. Our machine tool park includes all high quality and latest model CNC machines, many of these built to our requirements to accomplish special manufacturing jobs. All products and their performance are strictly controlled and our Quality control system is certified by DNV according to ISO 9001 norms. Our nozzles design requires expertise in hydrodynamics and fluids handling technology as well as a deep manufacturing know-how to give the best performances. It's not just a matter of mechanical processing.

Nozzles play an important role in industry and only the use of reliable quality products prevent the risk of damage and serious losses in production processes. PNR has extended its sales network to 55 Countries all over the world in 2015. Our sales engineers, fully trained in all industrial applications of our products and with a high technical knowledge, can help customers in finding the best solution for their needs, from process planning to production facilities improvement. We do not supply products only but also provide integrated services and technical assistance.

DISCLAIMER

Our products are manufactured with the best care and according to the latest developments of the technology available. However we cannot assure that every one of our products is perfectly fit for every specific application. The information in this catalogue is provided "as seen" and so we offer no warranty of any kind with respect to the subject matter or accuracy of the information contained herein. This publication may include technical inaccuracies or typographical errors and changes may be periodically made to the information herein without prior notice. As a result of continuous product improvement our documentation is regularly updated: please visit our website www.pnr.eu to be always updated.

PRODUCT WARRANTY

PNR products will be replaced or repaired at the option of PNR and free of charges if found defective in manufacturing, labelling and packaging. The above conditions will apply if notice of defects is received by PNR within 30 days from date of product installations or one year from date of shipment. The cost of above said replacement or repair shall be the exclusive remedy for any breach of any warranty, and PNR shall not be held liable for any damage due to personal injuries or commercial losses coming from product malfunction.

It is self-understood that no warranty may apply in case our products have been operated under nonacceptable conditions, like for example (but not limited to):

- Operation at pressures exceeding those shown in catalogue performance table
- Operation with or exposure to liquids containing abrasive particles
- Operation with or exposure to liquids producing a chemical attack on the nozzle material
- Mechanical damages to nozzle orifices, nozzle spray edge or body due to careless handling or assembling.

In all above cases, the customer must accept a nozzle life reduction below life expected, or performance parameters below the values in the catalogue.

The guarantee may be exercised as follows:

- By sending a precautionary report to PNR on the detected damages. This report can also be sent by email to this address: quality@pnr.it
- If PNR ascertains that the manufacturing faults are actually subject to the warranty, the product shall have to be returned to the manufacturer in its original packaging prior request of authorization to the manufacturer and receipt of manufacturer's written authorization.
- The rejected goods shall have to be returned by the means that PNR will communicate to the customer and the transportation costs of returned merchandise will be entirely borne by the manufacturer.

COPYRIGHT

All the contents (texts, images, graphics, layouts, etc.) of this document are property of PNR Italia Srl. Any redistribution or reproduction of part or all of the contents in any form is prohibited.

Our Quality System is
certified ISO 9001:2015
**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL**
= ISO 9001:2015 =




As any other industrial product, spray nozzles need to be precisely identified by means of a code in order to avoid mistakes.

PNR coding system was created bearing in mind the following requirements:

- Codes must be easily processed by a computer, in ascending order.
- Codes must be self-explaining with no need of additional descriptions.
- Codes must give the basic nozzle specifications so to be easily found in the catalogue.

Therefore, we have created our coding system as described here below:

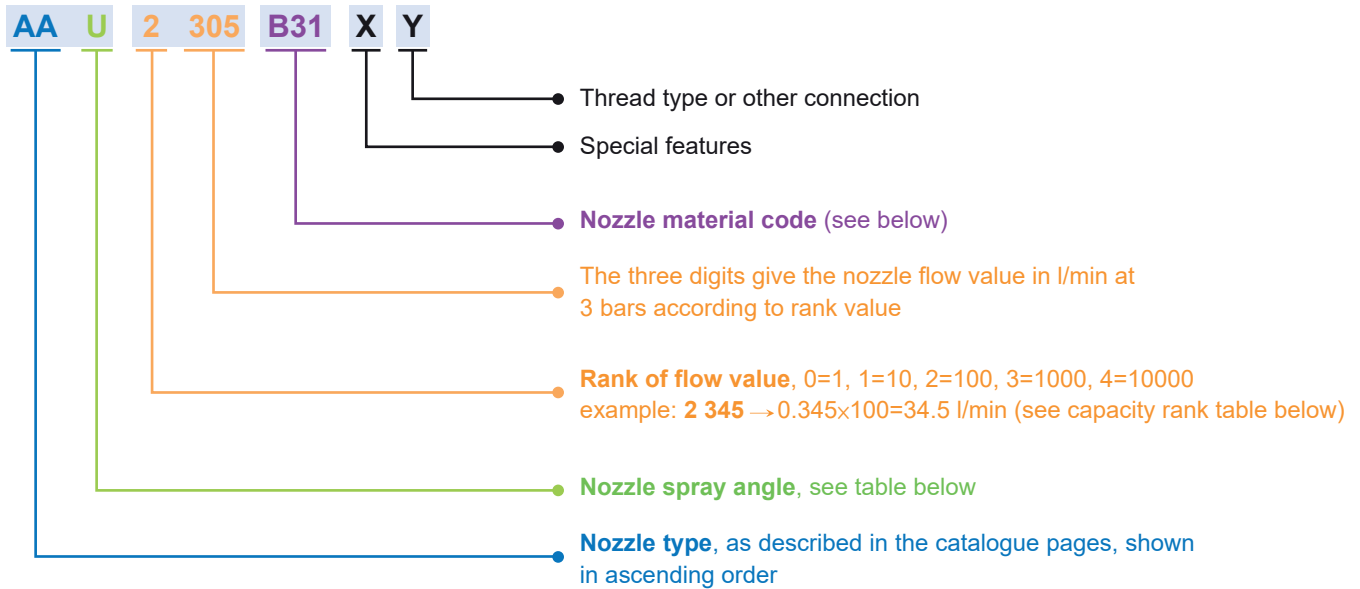

Capacity rank

Nozzles nominal flow rate, measured at 3.0 bar are highlighted on a yellow background in the catalogue tables. Flow values were calculated at different pressures.

Rank	Flow digits	Actual flow (l/min)
0	0 490	0.49
1	1 490	4.90
2	2 490	49.0
3	3 490	490
4	4 490	4900

Some spray angle codes (degrees)

These codes serve as an indication only. Based on different types of nozzles, their significance can be occasionally different.

Code	Spray angle	Code	Spray angle	Code	Spray angle
A	0°	L	40°	T	80°
B	15°	M	45°	U	90°
C	20°	N	50°	J	110°
D	25°	Q	60°	W	120°
F	30°	R	65°	Y	130°
H	35°	S	75°	Z	180°

Nozzle material codes

A1	Carbon steel	D6	Glassfibre reinforced PP	G1	Cast iron
A2	High speed steel	D7	High density polyethylene	H1	Titanium
A8	Zinc coated steel	D8	Polyvinylidene fluoride (PVDF)	L1	Monel 400
A9	Nickel coated steel	D82	PVDF, Injection molded	L2	Incolloy 825
B1	AISI 303 Stainless steel	E0	EPDM	L8	Hastelloy C276
B2	AISI 304 Stainless steel	E1	Polytetrafluorethylene (PTFE)	P6	Acr. But. Styrene (ABS)
B21	AISI 304L Stainless steel	E2	PTFE (15% glassfibers)	P8	EPDM 40 Shore
B3	AISI 316 Stainless steel	E31	Acetalic resin (POM)	T1	Brass
B31	AISI 316L Stainless steel	E6	LUCITE ® (PMMA)	T2	Brass, chrome plated
C2	AISI 416 Stainless steel, hardened	E7	Viton	T3	Copper
D1	Polyvinylchloride (PVC)	E8	Synthetic rubber (NBR)	T5	Bronze
D2	Polypropylene (PP)	F5	Ceramic	T8	Brass, nickel plated
D3	Polyamide (PA)	F30	Ruby insert, 303 body	T81	Brass, electroless nickel plated
D4	Nylon, Glassfibers reinforced	F31	Ruby insert, 316 body	V1	Aluminum
D5	Talcum filled Polypropylene	F32	Diamond insert, 303 body	V7	Aluminum, electroless n. plated
		F33	Diamond insert, 316 body		


THE PROCESS OF ATOMIZATION

A liquid spraying process can be described as consisting of two phases, namely:

1. breaking of the liquid into separate droplets
2. directing the liquid drops onto a surface or an object, to achieve the desired result.


Modern technology allows for a strict control of different parameters of a liquid spray; for example precise information can be obtained about droplet size spectrum, droplets speed and liquid distribution onto the spray target. In recent years we've supported our customers in improving their productivity and market share by providing them cutting edge industrial techniques.

PNR is your best partner to help you enhance your productivity and quality.

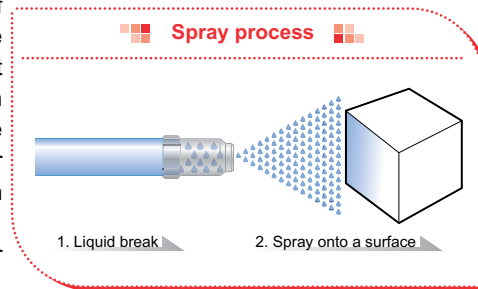


APPLICATIONS


Spraying a liquid through a spray nozzle can serve different purposes, among which the most important are the following:

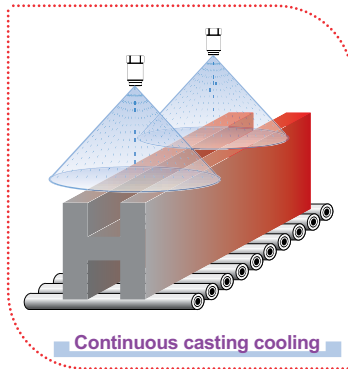


Cooling: heat transfer by spraying liquids onto the products surface for a rapid cooling, such as continuous casting cooling in steelworks.

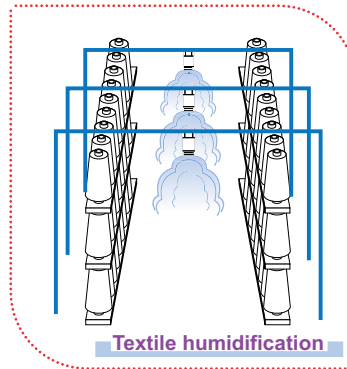


Humidification: spray of very little quantities of liquid onto the products surface into special chambers or rooms to raise relative humidity. A typical application is textiles humidification.

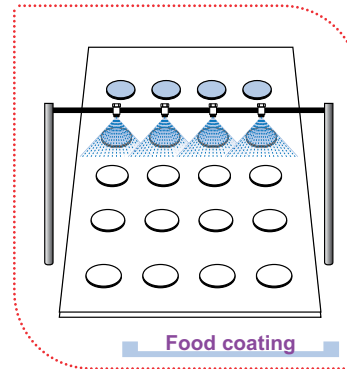


Coating: application of coatings or liquids on the food products surface. For example: oil-spraying on bread.

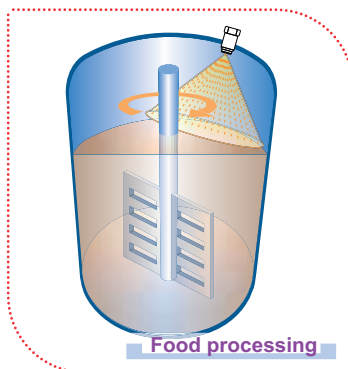

Food processing: spray to add specific ingredients or substances to speed up chemical reactions. For ex.: addition of fructose in fruit juices, etc.

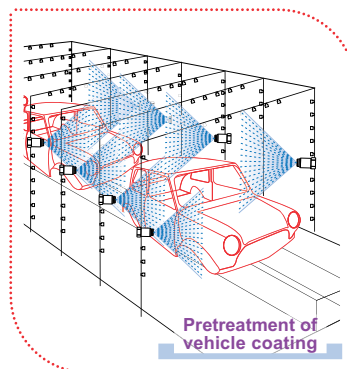

Washing: remove dirt from the product surface spraying liquids at high pressure, like in vehicles pre-wash treatment.

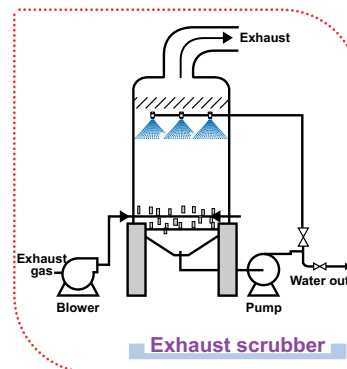

Pollution control: use of atomized scrubbing liquids to capture particulate matter and/or gaseous pollutants in liquid droplets, like in web scrubbers and spray towers.

How to choose the most suitable nozzle among those listed?

This is the first question most customers ask themselves. Do not be afraid to choose the wrong one. Contact us, tell us what you need and we will help you to make the right choice explaining how our nozzles work in a simple and user-friendly way.

SPRAY NOZZLES TECHNICAL FEATURES

Several technical features must be taken into account to select the proper nozzle. This will be dealt with on the following page.

1. NOZZLE EFFICIENCY


A spray nozzle is a device that turns the pressure energy of a liquid flow into kinetic energy. The nozzle efficiency can be defined as the ratio between the energy available at the nozzle inlet and the energy which is actually used to increase the liquid speed and create the spray, the difference being the energy lost during the process because of friction. Depending on the nozzle type and for a good quality machining, the nozzle efficiency varies between 55% and 95% for the types that are commonly used in industrial processes. What above stated is not valid for air-assisted atomizers which require a much higher energy because of the losses inherent in the energy transfer from compressed air to liquid surface.

2. DROPLETS SIZE

The droplets size depends on the structure of the atomizer, intensity of the liquids energy, liquid surface tension and density. The size of the atomized droplets is not uniform. Therefore, the average droplets size becomes an important factor. For example, the droplets size in gas quenching towers is extremely important. If their size is too big, they do not fully evaporate leading to dust bag failure. On the contrary, if the droplets size is too small, it's not possible to lower the temperature to the desired level and high temperature may cause the dust bags burn out.

There are four ways to express the droplets size:

The Sauter Mean Diameter (SMD) is the most commonly used. It refers to the drop volume/surface area ratio and it's often shown as D_{32} , μm (Micron) unit. ($1\mu\text{m}=10^{-3}\text{mm}$)

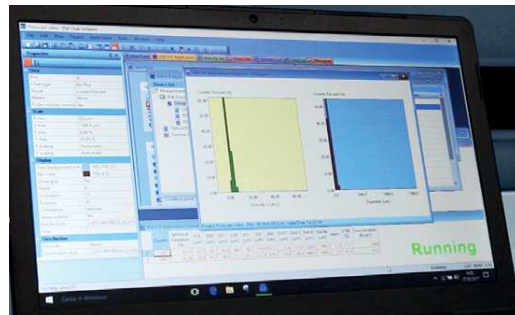

1 ARITHMETIC MEAN DIAMETER

This is a diameter value which, multiplied by the local number of droplets in the sample, equals the addition of all droplets diameters.

2 SURFACE MEAN DIAMETER

This is a diameter of such a droplet whose surface, multiplied by the total droplets number, equals the sum of all droplets surfaces.

3 VOLUME MEAN DIAMETER

This is the diameter of such a droplet whose volume, multiplied by the total droplets number, equals the sum of all droplets volumes.

4 SAUTER MEAN DIAMETER (D_{32})

This is the diameter of such a droplet whose volume/area ratio, equals the ratio between the sum of all droplet volumes divided by the sum of all droplet surfaces.

MEASUREMENT METHODS

SMD is tested using pure water at 30°C

Method by immersion

A glass dish containing 60% of silicone oil is passed quickly under the spraying nozzle. Silicon oil is heavier so the water droplets float on the oil surface. Every droplet diameter is recorded and the resulting average is the SMD. This is a difficult method to perform and for this reason it's rarely used.


Laser interferometer test

As different droplets have different PI, they produce different refraction angles. Therefore laser light can be used to measure their size. This type of method is fast and precise. PNR can perform this test with technologically advanced equipments and provide complete documentation containing test reports. Please contact us for more information.

SPRAY NOZZLES TECHNICAL FEATURES

3. SPRAY ANGLE

A spray angle is the angle formed by the cone of liquid leaving a nozzle orifice. The spray angle and the distance between the nozzle orifice and the target surface to be covered determine the spray coverage. (See page 116)

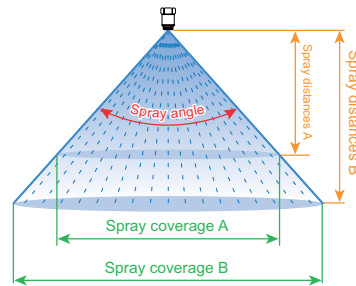

4. IMPACT FORCE

The impact force is the force generated by the jet of water deflected by the impact surface and its strength can be expressed as a force in kg or pounds or as a pressure in a given point in kg/mm² or lb/inch². The uniformity of a jet impact force and distribution influence the washing effect. Under the same operating conditions (same pressure and capacity), different types of nozzles can be used to perform an impact force test and the results are shown here below.



Straight nozzles > Flat fan nozzles > Hollow cone nozzles > Full cone and square nozzles

5. DISTRIBUTION

Engineers design nozzles with different spray distribution patterns. Patterns can be solid stream, full cone, hollow cone, flat spray, spoon flat fan. The nozzle design aims at the uniformity and impact force of the jet sprayed whether nozzles are used individually or overlapping. Below figures show detailed information for a variety of capacities and spray sections. We mark distribution on every page for your convenience.


This section provides a detailed breakdown of spray distributions. It consists of six columns, each representing a different nozzle type. Each column contains: 1. A top-down view of the spray pattern. 2. A cross-sectional view showing the distribution of spray particles as vertical bars of varying heights. 3. A dashed-line box containing a simplified representation of the spray pattern. Below each column is a label and a description of the distribution type.

Flat fan convex distribution	Flat fan even distribution	Full cone convex distribution	Full cone even distribution	Hollow cone concave distribution	Straight single-point distribution
Diagram showing a fan spray with higher density at the edges.	Diagram showing a fan spray with uniform density across the width.	Diagram showing a full cone spray with higher density at the center.	Diagram showing a full cone spray with uniform density across the area.	Diagram showing a hollow cone spray with a ring of high density and a concave center.	Diagram showing a single vertical jet of water.


SPRAY NOZZLE

Although nozzles are used to atomize liquids, the atomization precision and effect are deeply influenced by their quality. With our expertise we fully understand our customers needs and expectations and our engineers set high quality control standards not only for the operating precision of our nozzles but also for product inspection. **PNR ensures the best atomizing effects and provides capacity and spray angle accuracy with a tolerance of $\pm 10\%$ guarantee.** Below highlights of quality inspection.

1. Check if liquid flow and pressure are in direct proportion.
2. Check if spray angle is as required.
3. Check if capacity is as required.
4. Check if distribution is uniform.
5. Check if droplets diameter is uniform.




Check if liquid flow and pressure are in direct proportion.




Check if spray angle is as required.



Check if capacity is as required.




Check if distribution is uniform.



Check if droplets diameter is uniform.

TECHNIQUES FOR SPRAY PRODUCTION

Many different hydrodynamics techniques can be used to produce a spray and most of them are used today for nozzles to be applied in industrial processes.

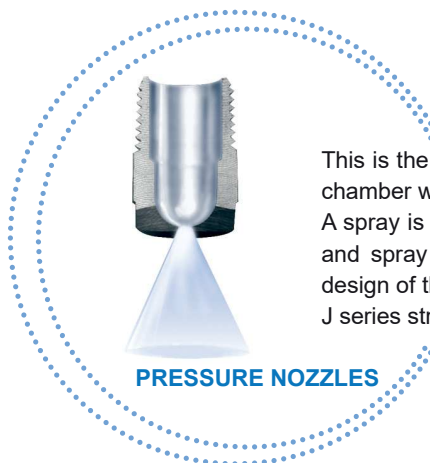


This is the simplest type of nozzle where an orifice is opened into a chamber where the liquid to be sprayed is fed under pressure. A spray is produced through the orifice with spray pattern, flow rate and spray angle depending upon the orifice edge profile and the design of the inside pressure chamber. Typical pressure nozzles are J series straight nozzles and F series high pressure flat fan nozzles.

Turbulence nozzles use specially shaped vanes which force the pressurized liquid into a whirl chamber producing its high-speed rotation. This breaks up the liquid which exists the nozzle orifice atomized at high-speed. Different nozzle structures and flow rates produce hollow cone, full cone and full square cone spray patterns. Typical turbulence nozzles are RA series hollow cone and D series full cone nozzles.



TECHNIQUES FOR SPRAY PRODUCTION

IMPACT NOZZLES

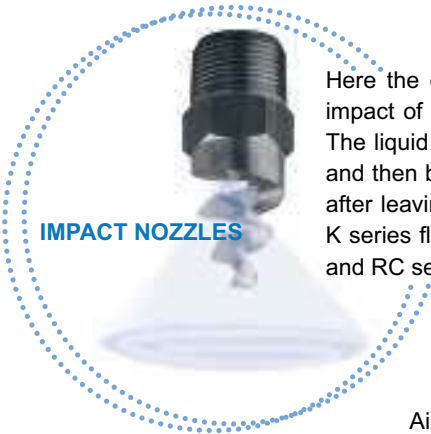

Here the desired spray shape is obtained producing an impact of the liquid jet onto a properly designed surface. The liquid jet is subsequently changed into a fluid lamina and then broken into drops with the desired spray pattern after leaving the nozzle edge. Typical impact nozzles are K series flat fan nozzles, E series spiral full cone nozzles and RC series hollow cone nozzles.




AIR ASSISTED ATOMIZERS




Air-assisted atomizers use their special design and pressurized gas to atomize a liquid and break it into tiny droplets (the smallest average particle size: 10 micron). Please refer to catalogue CTG AZ and contact us.

Air-assisted nozzles - Depending on the liquid supply, these nozzles are of two types: Pressure nozzles and Siphon nozzles.

PRESSURE NOZZLES

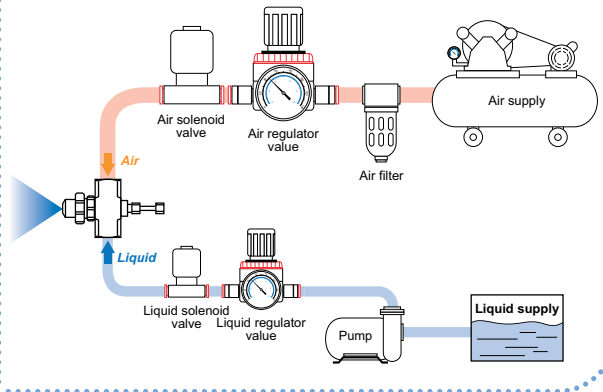


SIPHON NOZZLES

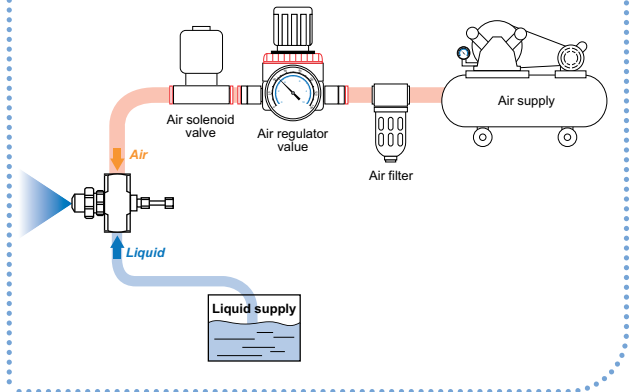

ULTRASONIC ATOMIZERS



Ultrasonic atomizers are sister products of air-assisted atomizers. The front-end has a titanium ultrasonic generator. It uses the energy of the high-speed impact to produce a high-frequency oscillation that micro-atomizes the liquid droplets. The special design produces tiny and uniform droplets (the average smallest particle size: 7 Micron). The advantages are vital to many applications. Ultrasonic atomizers have two phases of atomization. Phase one: liquids mix with pressured air and produce tiny droplets to spray. Phase two: when the atomized droplets hit the ultrasonic generator they get micro-atomized generating smaller droplets. Please contact us for catalogue CTG AZ and more information.

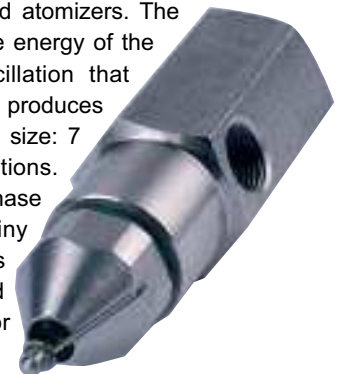

FULL CONE PATTERN

The shape of the tip determines the spray range of full cone nozzles. A typical application of these nozzles is continuous casting cooling when it's necessary to spray the same volume of liquids onto a surface to cool objects.

Our engineers design a series of full cone nozzles to satisfy different needs.

No matter what kind of full cone nozzles they are, they have unique applications.



STANDARD FULL CONE (Turbulence nozzle)

These nozzles use a specially shaped vane placed at the nozzle inlet to give a rotational speed to the fluid flowing through the nozzle.

Because of the rotational speed of the fluid, water exiting the nozzle orifice is subjected to centrifugal force and opens up in the shape of a full cone.

The extent of the angle of the cone is a function of both exit speed (created from the inlet pressure) and the internal design of the nozzle. It can vary in practice from 15° to 120°.

These nozzles can be also produced as square full cone nozzles where the square shape of the pyramidal spray is obtained by a special design of the outlet orifice.

Two important details have to be noted from the system designer when using these type of nozzles:

1. The spray angle is measured on the side of the square section.
2. The square section of the spray rotates within the distance from the nozzle orifice to the target area.



SPIRAL FULL CONE (Impact nozzle)

This is not properly a full cone but rather a continuous liquid curtain evolving with the shape of a spiral inside a conical volume. The disadvantage of a scarcely even distribution is compensated by an exceptionally good resistance to clogging, large orifice and vaneless which make this nozzle the best choice in those applications such as wet scrubber, fire-fighting systems, etc.



MULTIPLE FULL CONE (Turbulence nozzle)

Several nozzles are grouped in a cluster with different spray directions. These nozzles produce large capacity of watermist.

If you need both large capacity and mist, multi-orifice full cone nozzles are the best option.

FLAT FAN SPRAY PATTERN

A flat fan spray nozzle serves the purpose of spraying onto a surface or an object moving in a transverse direction with respect to the one of the jet surface, a typical example being the nozzles in a car washing tunnel. The vast majority of flat spray nozzles used in the industry work according to one of the following principles.

IN LINE FLAT FAN (Pressure nozzle)

This is the general purpose flat fan nozzle where the liquid enters the nozzle in line with the axis length and is fed to a pressure chamber from where it is ejected through the nozzle orifice. Flow value and spray angle are determined respectively from the orifice cross section and the orifice edge profile.

IN LINE STRAIGHT JET (Pressure nozzle)

Straight nozzles can be considered as flat fan nozzles as the only difference is the spray angle which is zero degrees in straight nozzles. These nozzles are often used in high-pressure operating environments where the wear resistance of the nozzles is very important. It ensures optimum service life and spray orientation. PNR offers a wide range of material selection.

- 416 hardened stainless steel
- Ruby nozzle + stainless steel body
- Tungsten carbide nozzle tip + stainless steel body

SPOON FLAT FAN (Impact nozzle)

These nozzles feature a flat fan spray. According to the different arc design, these spoon flat fan nozzles can be of two types: high impact with narrow spray angle or low pressure with wide spray angle.

- Under the same operating conditions, narrow angle high impact nozzles produce a higher impact force than standard flat fan nozzles. They are suitable for cleaning environments that need strong impact force.
- Low pressure nozzles with wider spray angle produce a 130° spray angle and a large area of water curtain effect. Low-impact spray nozzles are widely used in various applications such as foam removal, water curtain for gas separation, fruits and vegetables cleaning.



High impact types



Large spray angle

HOLLOW CONE SPRAY PATTERN

A hollow cone spray pattern is made of droplets concentrated on a ring-shaped impact area, with no droplets falling inside the conic volume. Under the same operating conditions, hollow cone nozzles produce a very fine atomized liquid mist and can capture a higher rate of suspended particles than other nozzles. They are widely used in exhaust scrubbers and gas cooling.

HOLLOW CONE (Turbulence nozzle)

These nozzles use a tangential injection of liquid into a whirling chamber to generate centrifugal forces which break up the liquid vein as soon as it leaves the orifice. Precisely designed orifice profiles, making use of the Coanda effect, provide the ability to obtain very large spray angles.

HOLLOW CONE (Deflection nozzle)

A hollow cone can also be obtained taking a liquid flow to change direction onto a properly designed surface in order to break the liquid into droplets and distributes them as a hollow cone spray pattern with clog resistance. This kind of nozzle is mainly used for applications in fire-fighting systems.



Concentrated high impact force

Solid stream nozzles provide a sharp and concentrated high pressure spray jet. These nozzles offer a stronger impact force than other types at the same operating pressures and flow rates.


Highly extended service life

Solid stream nozzles are designed for applications requiring medium or high liquid pressures. High pressures may shorten nozzles service life. After a long research and many application tests, our engineers found out that ruby with a second hardness level is the ideal material to overcome this problem and extend nozzles durability as it resists abrasion or scratching. The nozzle tips are precisely machined and polished to ensure a perfect solid stream and enhance performance.





Self-cleaning shower pipe and nozzles

Paper making requires a great deal of water. Waste water is often reused to clean filters and felts to save costs and reduce water consumption. Reclaimed water contains solids and impurities that cause nozzles clogging and shutdowns for maintenance. Self-cleaning spray pipes and nozzles are the best solution to this. Their revolutionary design helps improving a great deal both production efficiency and industrial competitiveness.

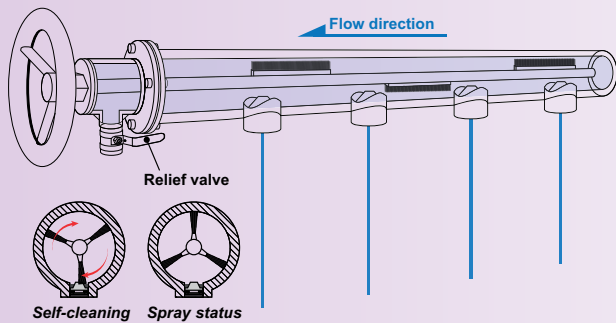

Self-cleaning spray pipes contain a rotating steel brush which can be automatically or manually operated and an escape valve at their outlet. The rotating brush removes all the dirt from the pipe walls using water.

The nozzle body contains a mobile piston and its opening and closing are controlled by the operating water pressure. For example, when nozzles wash mesh fabrics with an operating pressure of 3 bar, this pressure is higher than a spring force of 1 bar. Piston and nozzle body come close producing a flat fan. If the inlet pressure is reduced to 0.5 bar, lower than a spring force of 1 bar, piston and nozzle body separate opening to the maximum distance. Water pressure remains at 0.5 bar and removes any build up when back to normal condition. Self-cleaning nozzles are easy to install, align and clean and ensuring relevant time and costs savings. The spring force is set depending on customer's plant working pressure.

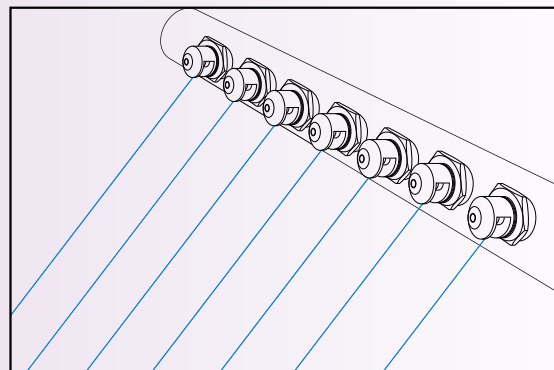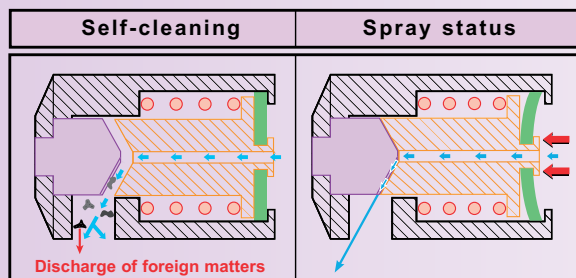


FAA/FBA HIGH IMPACT SOLID STREAM NOZZLES

FAA/FBA types nozzles are specially designed for high pressure cleaning and washing operations. They are made in Stainless Steel 416, accurately machined and perfectly polished. They are particularly hard, resistant to wear, have a long service life and offer high precision performances.




▪ **Typical applications**

Washing: filter cloth, felts, parts.


Other applications: paint scraping, rust removal, shell removal.

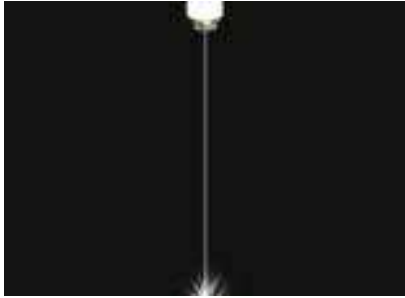

▪ **Thread specification:** BSPT, NPT



FAA




FBA

Nozzle type			US Gals	PNR Code	Capacity at different pressure values (l/min) (bar)						
FAA 1/8"	FBA 1/4"	FXA			20	30	50	70	100	150	200
•	•	•	015	1340	1.52	1.86	2.40	2.84	3.40	4.16	4.81
•	•	•	02	1460	2.00	2.50	3.20	3.80	4.60	5.60	6.40
•	•	•	025	1560	2.50	3.07	3.96	4.69	5.60	6.86	7.92
•	•	•	03	1686	3.10	3.70	4.80	5.70	6.80	8.40	9.70
•	•	•	035	1812	3.63	4.45	5.74	6.79	8.12	9.94	11.5
•	•	•	04	1930	4.16	5.09	6.58	7.78	9.30	11.4	13.2
•	•	•	045	2103	4.60	5.60	7.20	8.60	10.3	12.6	14.5
•	•	•	05	2116	5.10	6.20	8.10	9.50	11.4	14.0	16.1
•	•	•	055	2126	5.60	6.90	8.91	10.5	12.5	15.4	17.7
•	•	•	06	2138	6.10	7.50	9.70	11.4	13.8	16.7	19.3
•	•	•	065	2149	6.60	8.10	10.5	12.4	14.9	18.1	21.0
•	•	•	07	2160	7.16	8.76	11.3	13.4	16.0	19.6	22.6
•	•	•	075	2170	7.60	9.40	12.0	14.2	17.0	21.0	24.0
•	•	•	08	2181	8.20	10.0	12.9	15.3	18.1	22.0	26.0
•	•	•	085	2192	8.70	10.6	13.7	16.2	19.2	24.5	27.0
•	•	•	09	2204	9.20	11.2	14.5	17.2	20.4	25.0	29.0
•	•	•	095	2220	9.84	12.1	15.6	18.4	22.0	26.9	31.1
•	•	•	10	2230	10.2	12.5	16.1	19.1	23.0	28.0	32.0
•	•	•	11	2248	11.2	13.7	17.7	21.0	24.8	31.0	35.0
•	•	•	12	2272	12.2	15.0	19.3	23.0	27.2	33.0	39.0
•	•	•	12.5	2280	12.7	15.6	20.0	24.0	28.0	35.0	40.0
•	•	•	13	2296	13.3	16.2	21.0	25.0	29.6	36.0	42.0
•	•	•	14	2320	14.3	17.5	23.0	27.0	32.0	39.0	45.0
•	•	•	15	2341	15.3	18.7	24.0	29.0	34.1	42.0	48.0
•	•	•	16	2360	16.3	20.0	26.0	31.0	36.0	45.0	52.0
•	•	•	18	2410	18.3	22.0	29.0	34.0	41.0	50.0	58.0
•	•	•	20	2456	20.0	25.0	32.0	38.0	45.6	56.0	64.0
•	•	•	25	2567	25.0	31.0	40.0	48.0	56.7	70.0	81.0
•	•	•	30	2682	31.0	37.0	48.0	57.0	68.2	84.0	97.0
•	•	•	35	2800	36.0	44.0	56.0	67.0	80.0	98.0	113
•	•	•	40	2910	40.7	49.8	64.3	76.1	91.0	111	128
•	•	•	50	3113	51.0	62.0	81.0	95.0	113	140	161
•	•	•	60	3135	61.0	75.0	97.0	114	135	167	193

HOW TO MAKE UP THE NOZZLE CODE PRODUCT IDENTIFICATION CODE

The above table shows the "American Capacity Code", that is, the capacity in Gallons per minute at an operating pressure of 40 psi, and the "PNR Capacity Code" (in Litres/min) at a capacity of 100 bar. For the convenience of worldwide use, all nozzles are expressed with the US coding system.

For Example: nozzle **FBA 1686 C2** (PNR code) will be codified as **"00/03"** (US Gallons) with a spray angle 0° and capacity 0.3 Gals/min at a pressure of 40 psi.

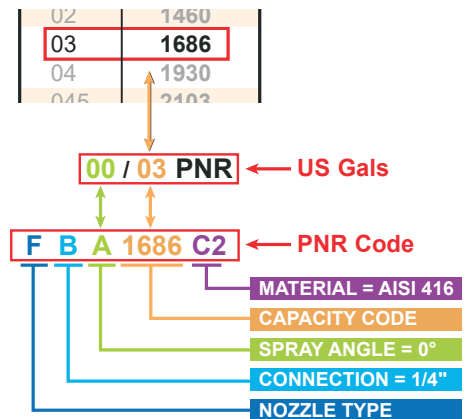

FLOW STABILIZER


Flow stabilizers are used to improve the stability of the liquid flow as they reduce losses caused by internal turbulence and allow to use a higher percentage of the liquid vein energy to generate a high impact solid flat fan. Flow stabilizers can be installed on all nozzles.




GDA SERIES NEEDLE JET NOZZLES

GDA models are classic high impact needle jet nozzles, easy to clean and clog-resistant. Their tips spray a solid stream of high pressure water inside pipes usually containing a steel brush that can be manually or automatically rotated. The rotating brush moving inside the pipe takes all the dirt off the inner walls and then flushes out the debris through an escape valve. For their revolutionary design, GDA nozzles are ideal for high pressure cleaning in paper mills and in all industrial processes requiring a high impact needle spray jet. Their resistance to clogging ensures greater productivity and low servicing costs.

- **Thread specification:** BSPT, 9/16-24NEF
- **Typical applications**
Washing: filter cloth washing, woolen blanket washing, parts washing
Other applications: scrape paint, rust removal




Spray section




Distribution




GDA needle jet nozzles are a one-piece construction, suitable to work with operating pressures lower than 20 bar and have a hard ruby spray tip, ideal to work with pressures lower than 200 bar. They are precisely machined and have a hydrodynamic design to produce a solid stream needle jet. Their stainless steel body and ruby tip ensure a long service life and a high resistance to wear.




Ruby nozzle tip




Ruby nozzle tip



Metal / Ruby nozzle tip



Metal




Metal

Nozzle type		Code	D mm	Capacity at different pressure values									(l/min) (bar)	
Stainless steel	Ruby insert			3.0	5.0	10	20	30	50	70	100	150		
•	•	GDA 0120 xx xy	0.35	0.12	0.15	0.22	0.31	0.54	0.69	0.82	0.98	1.20		
•	•	GDA 0170 xx xy	0.40	0.17	0.22	0.31	0.44	0.92	1.18	1.40	1.67	2.05		
•	•	GDA 0290 xx xy	0.50	0.29	0.37	0.53	0.75	1.01	1.31	1.55	1.85	2.26		
•	•	GDA 0320 xx xy	0.60	0.32	0.41	0.58	0.83	1.01	1.31	1.55	1.85	2.26		
•	•	GDA 0420 xx xy	0.70	0.42	0.54	0.77	1.08	1.33	1.71	2.03	2.42	2.97		
•	•	GDA 0500 xx xy	0.80	0.50	0.65	0.91	1.29	1.58	2.04	2.42	2.89	3.54		
•	•	GDA 0620 xx xy	0.85	0.62	0.80	1.13	1.60	1.96	2.53	2.99	3.58	4.38		
•	•	GDA 0780 xx xy	0.90	0.78	1.01	1.42	2.01	2.47	3.18	3.77	4.50	5.52		
•	•	GDA 0890 xx xy	1.00	0.89	1.15	1.62	2.30	2.81	3.63	4.30	5.14	6.29		
•	•	GDA 1120 xx xy	1.10	1.20	1.55	2.19	3.10	3.79	4.90	5.80	6.93	8.49		
•	•	GDA 1153 xx xy	1.20	1.53	1.98	2.79	3.95	4.84	6.25	7.39	8.83	10.8		
•	•	GDA 1160 xx xy	1.40	1.60	2.07	2.92	4.13							
•	•	GDA 1270 xx xy	1.80	2.70	3.49	4.93	6.97							
•	•	GDA 1450 xx xy	2.40	4.50	5.81	8.22	11.6							
•	•	GDA 1730 xx xy	3.20	7.30	9.42	13.3	18.8							


COMPLETE NOZZLE CODE	
x = Body length	y = Thread
A for 14.0 mm	A for 1/4" BSPT
B for 28.5 mm	B for 9/16-24 UNEF
C for 22.5 mm	

GD nozzles are installed with their spray tips inside the pipe that spray in high pressure fluids producing turbulence to remove all dirt off the inner pipe walls. Used in combination with self-cleaning pipes, these nozzles assure complete cleaning, productivity improvement, minimal maintenance.

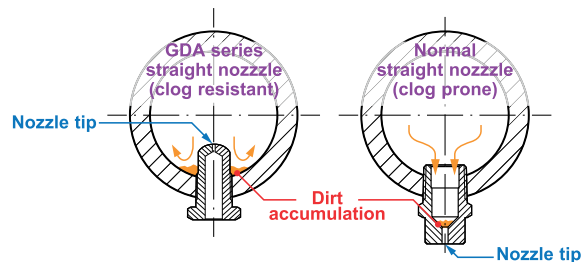

HOW TO MAKE UP THE NOZZLE CODE

EX.: GDA 0120 B1AA


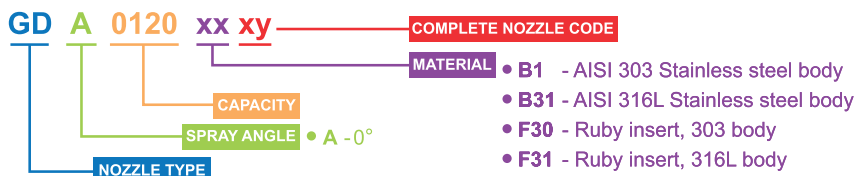



GMA SERIES PAPER WEB TRIMMERS

GMA nozzles produce a glass-rod like needle jet, ideal in paper mills to cut and trim the side of your paper web with a sharp edge, precise, clean and with no dust. They are precisely machined. Their smooth high quality ruby tip and special design produce a solid straight jet for precision trimming. A 150 mesh stainless steel filter avoids clogging. Their stainless steel body and ruby spray tip assures a long service life.



- **Thread specification:** 3/8" BSPT, 3/8" NPT
- **Filtering fineness:** 150 Mesh
- **Typical applications**
Felt and wire cleaning
Parts washing
Paper trimming

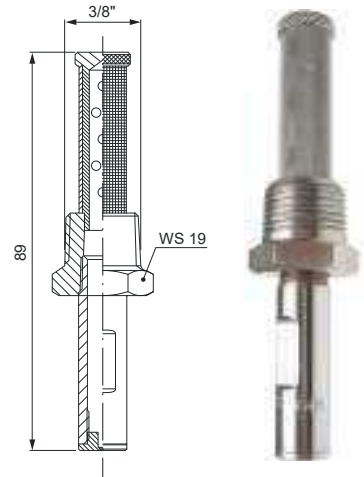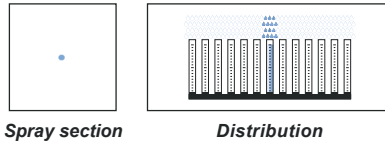


	Code	D mm
0°	GMA 0380 xxy	0.381
	GMA 0500 xxy	0.508
	GMA 0630 xxy	0.635
	GMA 0810 xxy	0.810
	GMA 0890 xxy	0.889
	GMA 0910 xxy	0.914
	GMA 1010 xxy	1.016
	GMA 1220 xxy	1.219

NEW **New code!**

GMA codes have been modified, based on the orifice diameter, measured for every nozzle. Please contact use if you need the capacity at different pressure.


PERFECT CLEANING

GMA top quality ruby tips produce a solid needle spray jet to trim paper web with a precise and sharp edge cut.

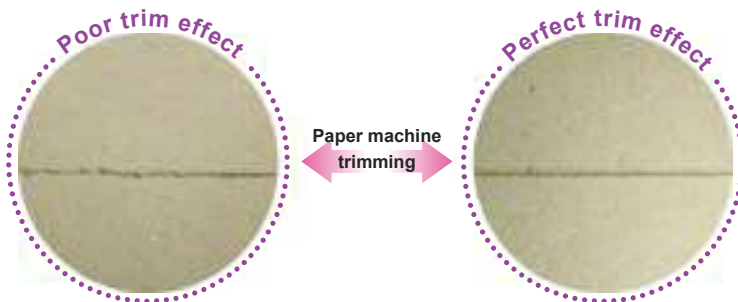

HOW TO MAKE UP THE NOZZLE CODE

EX.: GMA 0380 F30B

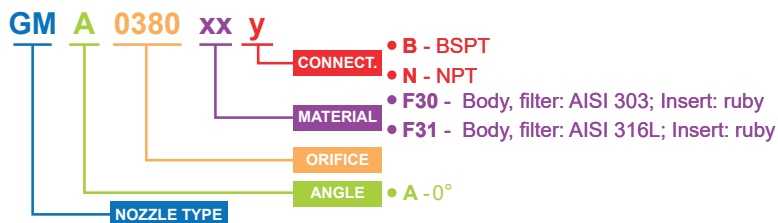




JAA




JBA

JAA/JBA HIGH IMPACT STRAIGHT JET NOZZLES


J type high impact straight jet nozzles are a one-piece construction in stainless steel, suitable to work with pressures lower than 20 bar, and have a ruby spray tip suitable for operating pressures lower than 200 bar. The two types, JAA and JBA, have a special hydrodynamic design and are machined with high precision to produce a solid needle jet. Their stainless steel body is highly resistant to chemicals and wear and assure a long service life.

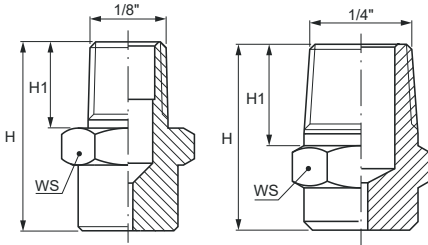

• Thread specification: BSPT



Spray section



Distribution



Typical applications

- Washing**
- Felts, filter cloths and parts washing
- Other applications**
- Paint scraping
- Rust and shell removal


DIMENSIONS AND WEIGHTS

Code	Size	H	H1	WS	W	
	unit	inch	mm	mm	mm	gram
JA	1/8"	19.5	11	12	9	
JB	1/4"	22.0	12	14	18	
JC	3/8"	25.0	14	17	34	

Nozzle type			Code	D	Capacity (l/min) at different pressure values (bar)			
JAA (1/8")	JBA (1/4")	JCA (3/8")			3.0	5.0	10	20
•	•		0060	0.28	0.06	0.08	0.11	0.15
•	•		0100	0.34	0.10	0.13	0.18	0.26
•	•		0130	0.38	0.13	0.17	0.24	0.34
•	•		0150	0.40	0.15	0.19	0.27	0.39
•	•		0200	0.46	0.20	0.26	0.37	0.52
•	•		0260	0.53	0.26	0.34	0.47	0.67
•	•		0390	0.66	0.39	0.50	0.71	1.01
•	•		0590	0.79	0.59	0.76	1.08	1.52
•	•		0780	0.91	0.78	1.01	1.42	2.01
•	•		1120	1.10	1.20	1.55	2.19	3.10
•	•		1160	1.30	1.60	2.07	2.92	4.13
•	•		1190	1.30	1.90	2.45	3.47	4.91
•	•		1233	1.50	2.33	3.01	4.25	6.02
•	•		1310	1.70	3.10	4.00	5.66	8.00
•	•		1385	1.80	3.85	4.97	7.03	9.94
•	•		1490	2.10	4.90	6.33	8.95	12.7
•	•		1581	2.30	5.81	7.50	10.6	15.0
•	•	•	1780	2.70	7.80	10.1	14.2	20.1
•	•	•	1980	3.00	9.80	12.7	17.9	25.3
•	•	•	2124	3.40	12.4	16.0	22.6	32.0
•	•	•	2153	3.80	15.3	19.8	27.9	39.5
•	•	•	2195	4.30	19.5	25.2	35.6	50.3
	•	•	2245	4.80	24.5	31.6	44.7	63.3
	•	•	2274	5.20	27.4	35.4	50.0	70.7
	•	•	2310	5.40	31.0	40.0	56.6	80.0
	•	•	2390	6.00	39.0	50.3	71.2	101
	•	•	2470	6.20	47.0	60.7	85.8	121

HOW TO MAKE UP THE NOZZLE CODE

EX.: JAA 0170 B1



- B1 - AISI 303 Stainless steel body
- B31 - AISI 316L Stainless steel body
- T1 - Brass