

ACCURATE SPRAYS OVERLAPPING


When full and hollow cone nozzles are used simultaneously, it's vital that they cover a uniform spray volume. In general there are two methods to achieve accurate nozzles settings: matrix configuration and offset configuration. See here below.

Matrix configuration

- O** - width of overlapping area
- D** - diameter of spray range
- H** - nozzle distance to the object being sprayed
- P** - nozzle spacing
- θ** - spray angle

$$\text{Nozzle spacing}(P) = \frac{D}{\sqrt{2}}$$

$$\text{Overlap}(O) = D - P$$

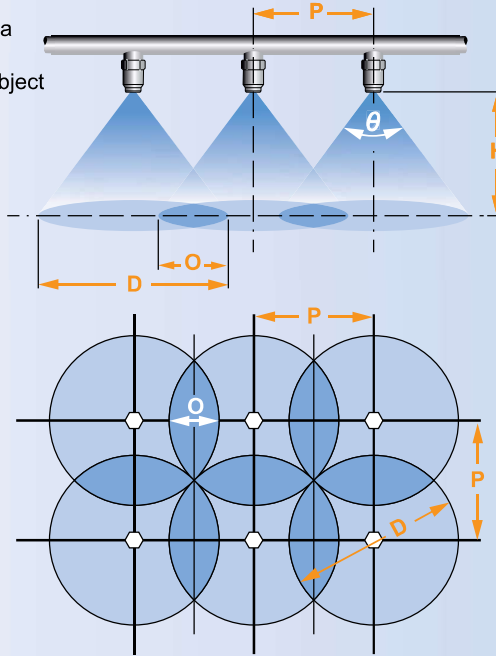


Offset configuration


- O** - width of overlapping area
- D** - diameter of spray range
- H** - nozzle distance to the object being sprayed
- P** - nozzle spacing
- θ** - spray angle

$$\text{Nozzle spacing}(P_1) = \frac{D}{2} \times \sqrt{3}$$

$$\text{Nozzle spacing}(P_2) = \frac{3}{4}D$$

$$\text{Overlap}(O) = D - P_1$$

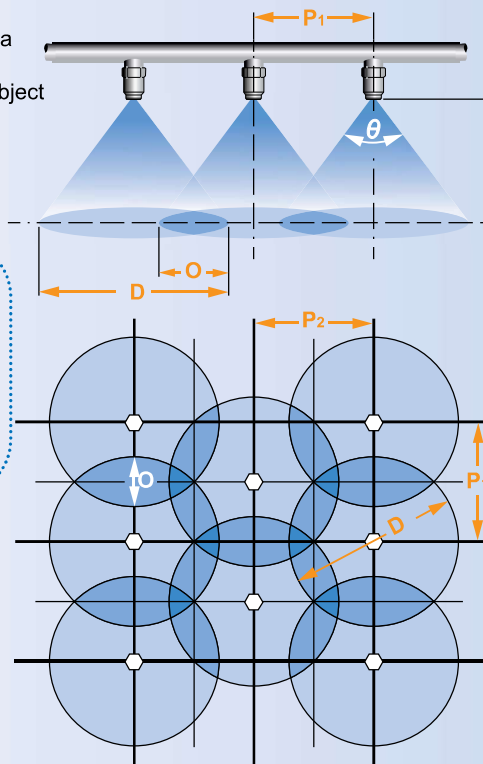




SPIRAL NOZZLES / WIDE FREE PASSAGE


The E-X series nozzles, with their typical elongated spiral design, work on the impact principle, by deflection of a water stream onto their spiral profile that provides the desired spray angle. Their specific shape with no internal parts leaves a larger internal free passage suitable to work with higher capacities and for higher clog resistance than other nozzles of the same size.

The capacity values on darker background can be obtained with metal nozzles only as plastic nozzles cannot ensure resistance in harsh operating conditions. If the capacity values you are looking for are those on darker background, we recommend to choose metal nozzles for their longer operating life.

■ Thread specification: BSPT, NPT



Spray section



Convex distribution



Typical applications

- Gas cooling
- Exhaust scrubbers
- Desulfurization
- Cooling

Other applications

- Spray of chemicals
- Fire prevention
- Fire suppression

| Code | RG inch | D mm | D1 mm | Capacity at different pressure values (l/min) (bar) | | | | | | | | Dimension mm | | | |
|--------|------------|---------|----------|---|------|------|------|------|------|------|-----|-----------------|------|------|------|
| | | | | 0.7 | 1.0 | 2.0 | 3.0 | 5.0 | 7.0 | 10 | H | H1 | WS | | |
| 120° | 3/8" | 4.8 | 4.8 | 11.4 | 13.6 | 19.2 | 23.5 | 30.3 | 35.9 | 42.9 | 70 | 15 | 22 | | |
| | | | | 5.6 | 5.6 | 15.3 | 18.3 | 25.9 | 31.7 | 40.9 | | | | 48.4 | 57.9 |
| | | | | 6.4 | 6.4 | 20.0 | 24.0 | 33.9 | 41.5 | 53.6 | | | | 63.4 | 75.8 |
| | 1/2" | 9.5 | 9.5 | 45.6 | 54.5 | 77.1 | 94.4 | 122 | 144 | 172 | 86 | 18 | 27 | | |
| | | | | 11.1 | 11.1 | 61.8 | 73.9 | 105 | 128 | 165 | | | | 196 | 234 |
| | | | | 12.7 | 12.7 | 79.7 | 95.3 | 135 | 165 | 213 | | | | 252 | 301 |
| | 3/4" | 16.0 | 16.0 | 126 | 150 | 212 | 260 | 336 | 397 | 475 | 131 | 26 | 34 | | |
| | | | | 19.0 | 19.0 | 180 | 215 | 304 | 372 | 480 | | | | 568 | 679 |
| | | | | 22.2 | 22.2 | 245 | 293 | 414 | 507 | 655 | | | | 774 | 926 |
| | 1" | 25.4 | 25.4 | 320 | 383 | 541 | 663 | 856 | 1013 | 1210 | 171 | 27 | 50 | | |
| | | | | 28.6 | 28.6 | 361 | 431 | 610 | 747 | 964 | | | | 1141 | 1364 |
| | | | | 35.0 | 35.0 | 527 | 629 | 890 | 1090 | 1407 | | | | 1665 | 1990 |
| 1 1/2" | 38.1 | 38.1 | 672 | 803 | 1136 | 1391 | 1796 | 2125 | 2540 | 279 | 32 | 65 | | | |
| | | | 44.5 | 44.5 | 985 | 1178 | 1666 | 2040 | 2634 | | | | 3116 | 3725 | |
| | | | 51.0 | 51.0 | 1280 | 1530 | 2164 | 2650 | 3421 | | | | 4048 | 4838 | |
| 2" | 63.5 | 63.5 | 1990 | 2379 | 3364 | 4120 | 5319 | 6293 | 7522 | 293 | 36 | 115 | | | |
| | | | 3" | 44.5 | 44.5 | 985 | 1178 | 1666 | 2040 | | | | 2634 | 3116 | 3725 |
| 3" | 51.0 | 51.0 | 1280 | 1530 | 2164 | 2650 | 3421 | 4048 | 4838 | 267 | 32 | 90 | | | |
| | | | 4" | 63.5 | 63.5 | 1990 | 2379 | 3364 | 4120 | | | | 5319 | 6293 | 7522 |

ES / SILICON CARBIDE NOZZLES

PNR designs and supplies spiral nozzles made out of several types of silicon carbide for applications where fluids containing abrasive solid particles must be sprayed and long nozzle service life is required. Please contact our Sales department for more detailed information.



ES / SILICON CARBIDE NOZZLES

HOW TO MAKE UP THE NOZZLE CODE

Spiral nozzles with extra wide internal passage are widely used in pollution treatment and can be supplied with customized connections. Please refer to the picture of Silicon carbide nozzles on the left. Locknut fitting makes assembly easier and more convenient. This design, the only one possible for Silicon carbide nozzles, is optional for nozzles cast in alloys or stainless steel. To identify such nozzles, please note the following product coding.


EHW 3747 xx Xy

xx = Material code, see MATERIAL table on the below page

y = CONNECTION CODE B - BSPT, Male thread
N - NPT, Male thread
F - Locknut fitting

HOW TO MAKE UP THE NOZZLE CODE

EX.: ECW 2230 B31XB

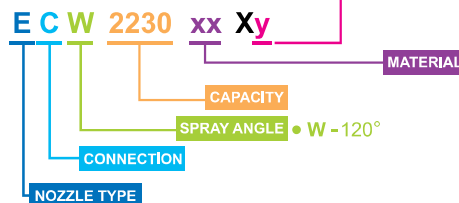

- B31 - AISI 316L Stainless steel
- T1 - Brass
- D1 - PVC
- D2 - PP
- D8 - PVDF
- E1 - PTFE
- L61 - Hastelloy C 22
- Special materials are quoted on request